

Beverage Table

Item: _____

Quantity: _____

Project: _____

Date: _____



36-BT Beverage Table shown.

MODELS

	length
<input type="checkbox"/> 28-BT	28 ³ / ₈ "
<input type="checkbox"/> 36-BT	36 ³ / ₈ "
<input type="checkbox"/> 50-BT	50 ³ / ₈ "
<input type="checkbox"/> 60-BT	60 ³ / ₈ "
<input type="checkbox"/> 66-BT	66 ³ / ₈ "
<input type="checkbox"/> 74-BT	74 ³ / ₈ "
<input type="checkbox"/> 84-BT	84 ³ / ₈ "
<input type="checkbox"/> 96-BT	96 ³ / ₈ "
<input type="checkbox"/> 144-BT	144 ³ / ₈ "

Top:

- 36" Counter Top Height
- Other Height (specify _____)
- Top Extensions (width _____)
- Top Extensions (length _____)
- Drop-Ins (specify _____)
- Drain Trough length (specify _____)

Tray Slide:

- Stainless Steel
- Solid "V" ridge
- Flat Surface
- Solid Surface
- Corian® (specify _____)
- Powder Coated brackets (specify RAL #)
- 34" Tray Slide Height
- Other Slide Height _____

Above the Top:

- Overshelf
- Sloped Front Protector
- Curved Front Protector
- Other Style Protector (specify _____)
- Buffet Shield Single Service
- Buffet Shield Double Service
- Lift-up Hinge for shield
- 2 tier Display Shelf, single service
- 2 tier Display Shelf, double service
- 3 tier Display Shelf, single service
- 3 tier Display Shelf, double service
- Curved Glass for Display Shelf
- Powder Coated finish (specify RAL #)
- Fluorescent Lights

Base Options:

- Enclosed Base (specify EB after model #)
- Cam Operated Line-up Locks
- Hinged Doors
- Fiberglass Door Panels
- End Drop Shelf
- Custom Color (specify RAL #)
- 5" Diameter Casters
- Stainless Steel Legs
- Cashier Station
- Other _____

Cutting Board:

- 8" wide Stainless Steel
- 8" wide Richlite® composite
- Other width _____

- ▶ Versatile counters, add the options you need!
- ▶ Durable, colorful, molded fiberglass
- ▶ East to clean, low maintenance

Electrical Options:

- Convenience outlet, flush
- Convenience outlet, pedestal
- Daisy chain
- Load center

Other Options:

- Canopy (specify style & color)
- Over-structure with signage & lights (specify _____)
- Theme Package
 - School Bus
 - Train
 - Space Shuttle
 - Covered Wagon
 - Circus Train
 - Other (specify)






Beverage Table

Item: _____

Quantity: _____

Project: _____

Date: _____

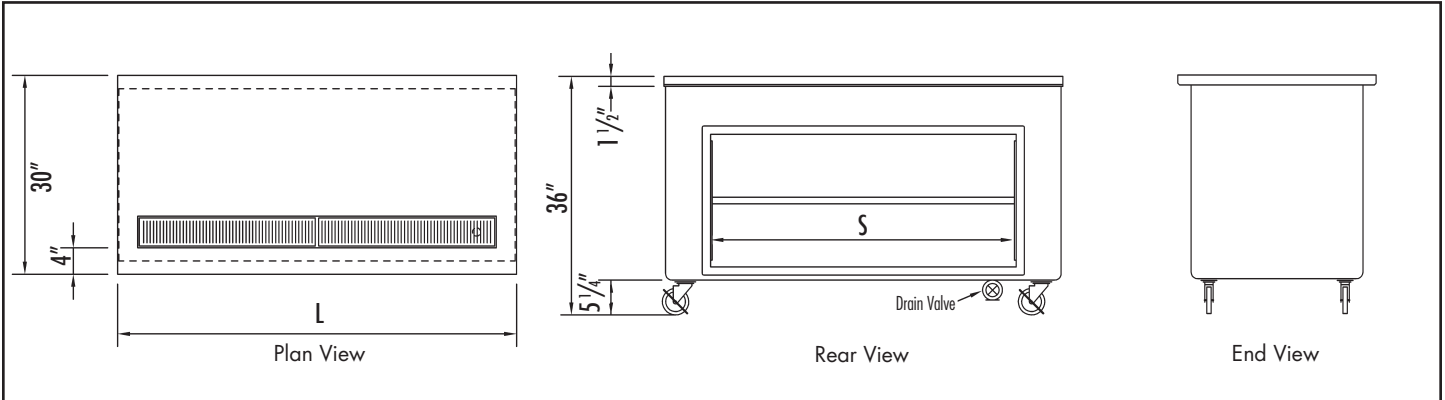

MODEL	L	S	APPROX. SHIP WEIGHT
28-BT	28 3/8"	N/A	205 lbs.
36-BT	36 3/8"	15"	220 lbs.
50-BT	50 3/8"	36"	260 lbs.
60-BT	60 3/8"	46"	300 lbs.
66-BT	66 3/8"	46"	320 lbs.
74-BT	74 3/8"	(2) 28"	340 lbs.
84-BT	84 3/8"	28" & 36"	360 lbs.
96-BT	96 3/8"	28" & 46"	380 lbs.
144-BT	144 3/8"	(2) 46"	750 lbs.

TOP: Top to be 30" wide and fabricated from a minimum of 14 ga. stainless steel with square turndown on all sides and corners fully welded, ground and polished. Top to have #4 satin finish and with all edges having a #7 hi-lite finish.

BODY: Body to be seamless molded fiberglass (F.R.P.) with smooth exterior surfaces and rounded corners. To be constructed by a hand lay-up process with four layers of 1.5 oz continuous strand fiberglass mat, plus a 24 oz layer of woven roving on the bottom for added strength. Fiberglass to be flame retardant per specification ASTM E-162 having a flame spread of 25 or

less. Body interior to be reinforced at each end with 4" wide, 12 gauge galvanized channels welded to form integral "U" frame for maximum stress relief.

Rear of body to have an open storage base made from 18-gauge stainless steel. Liner to have removable top panels to allow for service access.

CASTERS: 4" diameter, ball bearing, swivel type casters to be non-marking and with brakes on all wheels. Casters to be mounted thru two 12 gauge channels for extra rigidity.

DRAIN TROUGH: 14 ga. stainless steel drain trough welded into top and fitted with a removable stainless steel anti-splash grid. Trough to slope to 1" open brass drain and extend to shut off valve located below base.

We reserve the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacement for previously purchased equipment.

All equipment to be built in accordance with the Underwriters Laboratories, Inc. and the National Sanitation Foundation, Inc. standards and shall bear the Underwriters Laboratories, Inc. listing label for safety and the Underwriters Laboratories classification label for sanitation.

05/2006



P.O. Box 795 • Jonesboro, GA 30237
 Tel: 770.478.8803 • Fax: 770.471.3715
 www.lowtempind.com • colorpoint@lowtempind.com

