

Ice Cooled Food Table

Item: _____

Quantity: _____

Project: _____

Date: _____



CFI-74 shown with optional solid tray slide and two tier display stand.

MODELS

| | |
|----------------------------------|----------|
| <input type="checkbox"/> 36-CFI | 36 3/8" |
| <input type="checkbox"/> 50-CFI | 50 3/8" |
| <input type="checkbox"/> 60-CFI | 60 3/8" |
| <input type="checkbox"/> 66-CFI | 66 3/8" |
| <input type="checkbox"/> 74-CFI | 74 3/8" |
| <input type="checkbox"/> 84-CFI | 84 3/8" |
| <input type="checkbox"/> 96-CFI | 96 3/8" |
| <input type="checkbox"/> 144-CFI | 144 3/8" |

Top:

- 36" Counter Top Height
- Other Height (specify _____)
- Top Extensions (width _____)
- Top Extensions (length _____)

Above the Top:

- Overshelf
- Sloped Front Protector
- Curved Front Protector
- Other Style Protector (specify _____)
- Buffet Shield Single Service
- Buffet Shield Double Service
- Lift-up Hinge for shield
- 2 tier Display Shelf, single service
- 2 tier Display Shelf, double service
- 3 tier Display Shelf, single service
- 3 tier Display Shelf, double service
- Curved Glass for Display Shelf
- Powder Coated finish (specify RAL #)
- Fluorescent Lights

Tray Slide:

- Stainless Steel
- Solid "V" ridge
- Flat Surface
- Tubular
- Solid Surface
- Corian® (specify _____)
- Powder Coated brackets (specify RAL #)
- 34" Tray Slide Height
- Other Slide Height _____

Base Options:

- Enclosed Base (specify EB after model #)
- Cam Operated Line-up Locks
- Hinged Doors
- Fiberglass Door Panels
- End Drop Shelf
- Custom Color (specify RAL #)
- 5" Diameter Casters
- Stainless Steel Legs
- Other _____

Cutting Board:

- 8" wide Stainless Steel
- 8" wide Richlite® composite
- Other width _____

- ▶ Durable, colorful, molded fiberglass.
- ▶ East to clean, low maintenance.
- ▶ Convenient portability, or use in a line-up.
- ▶ Full complement of options available.

Electrical Options:

- Convenience outlet, flush
- Convenience outlet, pedestal
- Daisy chain
- Load center

Other Options:

- Canopy (specify style & color)
- Over-structure with signage & lights (specify _____)
- Theme Package
 - School Bus
 - Train
 - Space Shuttle
 - Covered Wagon
 - Circus Train
 - Other (specify)




Ice Cooled Food Table

Item: _____

Quantity: _____

Project: _____

Date: _____

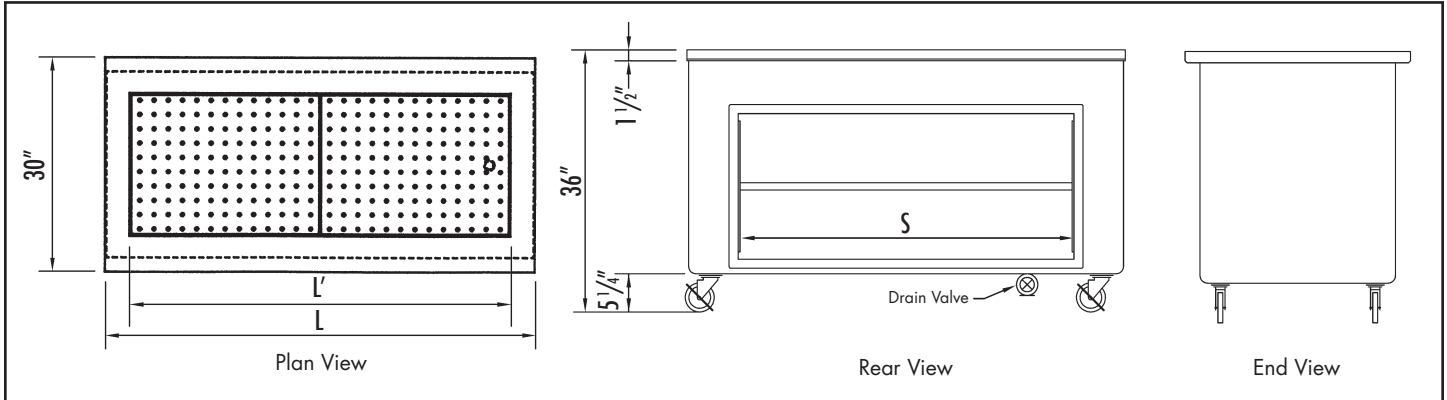

| MODEL | L | L' | S | APPROX. SHIP WEIGHT |
|---------|----------|-----|-----------|---------------------|
| 36-CFI | 36 3/8" | 25" | 15" | 300 lbs. |
| 50-CFI | 50 3/8" | 38" | 36" | 350 lbs. |
| 60-CFI | 60 3/8" | 51" | 46" | 480 lbs. |
| 66-CFI | 66 3/8" | 51" | 46" | 500 lbs. |
| 74-CFI | 74 3/8" | 64" | (2) 28" | 576 lbs. |
| 84-CFI | 84 3/8" | 64" | 36" & 28" | 600 lbs. |
| 96-CFI | 96 3/8" | 77" | 46" & 28" | 650 lbs. |
| 144-CFI | 144 3/8" | 77" | (2) 46" | 800 lbs. |

Note: Ice pans need not be full length of body. (specify pan length _____)

ICE COOLED FOOD TABLE

TOP: Top to be 30" wide and fabricated from a minimum of 14 ga. stainless steel with square turndown on all sides and corners fully welded, ground and polished. Top to have #4 satin finish and with all edges having a #7 hi-lite finish.

BODY: Body to be seamless molded fiberglass (F.R.P.) with smooth exterior surfaces and rounded corners. To be constructed by a hand lay-up process with four layers of 1.5 oz continuous strand fiberglass mat, plus a 24 oz layer of woven roving on the bottom for added strength. Fiberglass to be flame retardant per specification ASTM E-162

having a flame spread of 25 or less. Body interior to be reinforced at each end with 4" wide, 12 gauge galvanized channels welded to form integral "U" frame for maximum stress relief. Rear of body to have an open storage base made from 18-gauge stainless steel. Liner to have removable top panels to allow for service access.

CASTERS: 4" diameter, ball bearing, swivel type casters to be non-marking and with brakes on all wheels. Casters to be mounted thru two 12 gauge channels for extra rigidity.

COLD PAN: The ice cooled cold pan shall be of 18 ga. stainless steel and be 6" deep

or as required. The welded watertight pan to be fully insulated with urethane insulation and have sectional, removable false bottom. A full perimeter breaker strip shall separate the top from the cold pan. Pan to have 1" open brass drain with extension to shut-off valve below base.

We reserve the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacement for previously purchased equipment.

All equipment to be built in accordance with the Underwriters Laboratories, Inc. and the National Sanitation Foundation, Inc. standards and shall bear the Underwriters Laboratories, Inc. listing label for safety and the Underwriters Laboratories classification label for sanitation.

08/2006



P.O. Box 795 • Jonesboro, GA 30237
 Tel: 770.478.8803 • Fax: 770.471.3715
 www.lowtempind.com • colorpoint@lowtempind.com

