

# Refrigerated Frost Top Table



36-CFT shown with optional tray slide, cutting board, sloped front protector and fluorescent light.

Item: \_\_\_\_\_

Quantity: \_\_\_\_\_

Project: \_\_\_\_\_

Date: \_\_\_\_\_

## MODELS

<input type="checkbox"/> 36-CFT	36 3/8"
<input type="checkbox"/> 50-CFT	50 3/8"
<input type="checkbox"/> 60-CFT	60 3/8"
<input type="checkbox"/> 66-CFT	66 3/8"
<input type="checkbox"/> 74-CFT	74 3/8"
<input type="checkbox"/> 84-CFT	84 3/8"
<input type="checkbox"/> 96-CFT	96 3/8"
<input type="checkbox"/> 144-CFT	144 3/8"

### Top:

- 36" Counter Top Height
- Other Height (specify \_\_\_\_\_)
- Top Extensions (width \_\_\_\_\_)
- Top Extensions (length \_\_\_\_\_)

### Above the Top:

- Overshelf
- Sloped Front Protector
- Curved Front Protector
- Other Style Protector (specify \_\_\_\_\_)
- Buffet Shield Single Service
- Buffet Shield Double Service
- Lift-up Hinge for shield
- 2 tier Display Shelf, single service
- 2 tier Display Shelf, double service
- 3 tier Display Shelf, single service
- 3 tier Display Shelf, double service
- Curved Glass for Display Shelf
- Powder Coated finish (specify RAL #)
- Fluorescent Lights
- Refrigerated Over Shelf

### Cutting Board:

- 8" wide Stainless Steel
- 8" wide Richlite® composite
- Other width \_\_\_\_\_

### Tray Slide:

- Stainless Steel
- Solid "V" ridge
- Flat Surface
- Tubular Solid Surface
- Corian® (specify \_\_\_\_\_)
- Powder Coated brackets (specify RAL #)
- 34" Tray Slide Height
- Other Slide Height \_\_\_\_\_

### Base Options:

- Enclosed Base (specify EB after model #)
- Cam Operated Line-up Locks
- Drain Options \_\_\_\_\_
- Hinged Doors
- Refrigerated Base
- Fiberglass Door Panels
- End Drop Shelf
- Powder Coat Louvers (specify RAL #)
- Custom Color (specify RAL #)
- 5" Diameter Casters
- Stainless Steel Legs
- Other \_\_\_\_\_

- ▶ All Frost Top units are sanitation classified under ANSI/NSF-2. (For the new NSF-7 requirements, see our CFMA and CFMX series)
- ▶ Removable, washable grate keeps product from freezing to the surface.

### Electrical Options:

- Convenience outlet, flush
- Convenience outlet, pedestal
- Daisy chain
- Load center

### Other Options:

- Canopy (specify style & color)
- Over-structure with signage & lights (specify \_\_\_\_\_)
- Theme Package
  - School Bus
  - Train
  - Space Shuttle
  - Covered Wagon
  - Circus Train
  - Other (specify)




# Refrigerated Frost Top Table

Item: \_\_\_\_\_

Quantity: \_\_\_\_\_

Project: \_\_\_\_\_

Date: \_\_\_\_\_

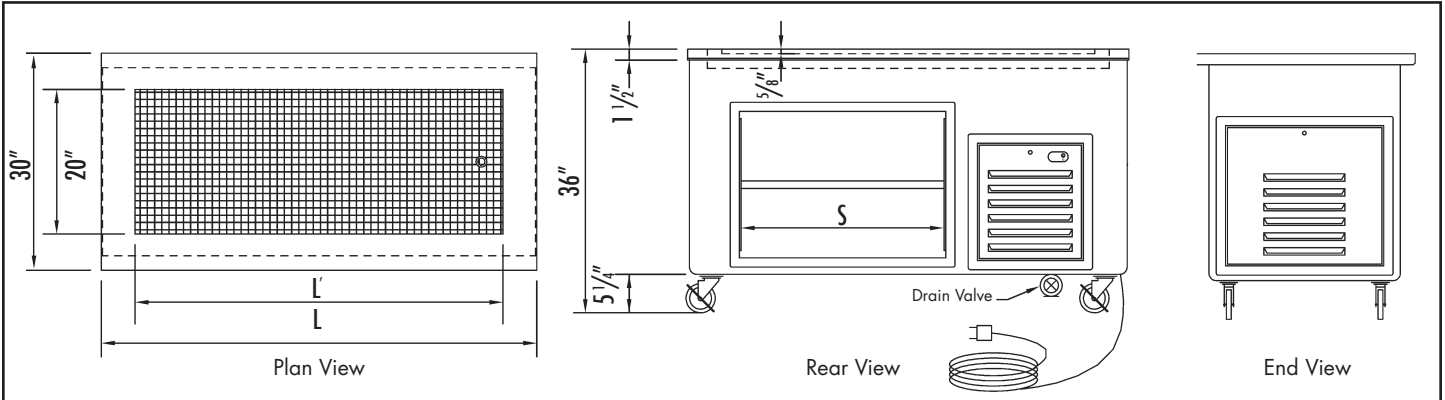

MODEL	UNIT LENGTH (L)	FROST TOP LENGTH (L')	STORAGE LENGTH (S)	COMP.	120V, 1 phase		APPROXIMATE SHIP WEIGHT
					AMPS	NEMA	
36-CFT	36 3/8"	25"	N/A	1/4	6.7	5-15P	400 lbs.
50-CFT	50 3/8"	38"	15"	1/4	6.7	5-15P	450 lbs.
60-CFT	60 3/8"	51"	28"	1/4	6.7	5-15P	580 lbs.
66-CFT	66 3/8"	51"	28"	1/4	6.7	5-15P	600 lbs.
74-CFT	74 3/8"	64"	36"	1/4	6.7	5-15P	676 lbs.
84-CFT	84 3/8"	76"	46"	1/4	6.7	5-15P	700 lbs.
96-CFT	96 3/8"	88"	(2) 28"	1/3	7.1	5-15P	750 lbs.
144-CFT	144 3/8"	88"	(2) 46"	1/3	7.1	5-15P	900 lbs.

Adding additional electrical components will change the total electric load.

## Refrigerated Frost Top Table

**TOP:** Top to be 30" wide and fabricated from a minimum of 14 ga. stainless steel with square turndown on all sides and corners fully welded, ground and polished. Top to have #4 satin finish and with all edges having a #7 hi-lite finish.

**BODY:** Body to be seamless molded fiberglass (F.R.P.) with smooth exterior surfaces and rounded corners. To be constructed by a hand lay-up process with four layers of 1.5 oz continuous strand fiberglass mat, plus a 24 oz layer of woven roving on the bottom for added strength. Fiberglass to be flame retardant per specification ASTM E-162 having a flame spread of 25 or less. Body interior to be reinforced at each

end with 4" wide, 12 gauge galvanized channels welded to form integral "U" frame for maximum stress relief.

Rear of body to have an open storage base made from 18-gauge stainless steel. Liner to have removable top panels to allow for service access.

**CASTERS:** 4" diameter, ball bearing, swivel type casters to be non-marking and with brakes on all wheels. Casters to be mounted thru two 12 gauge channels for extra rigidity.

**FROST TOP:** To be a stainless steel watertight pan mounted under a turndown in the 14 gauge stainless steel top providing a 5/8" recess. Recess shall accommodate a removable, washable grate to keep product

from freezing to the pan. To have a continuous refrigeration coil bonded to the underside, fully insulated with urethane insulation. To include a full perimeter breaker strip, and a 1" open brass drain extended to a shut-off valve below the body. Temperature shall be maintained by a self-contained, fully hermetic type R-22 condensing unit

We reserve the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacement for previously purchased equipment.

All equipment to be built in accordance with the Underwriters Laboratories, Inc. and the National Sanitation Foundation, Inc. standards and shall bear the Underwriters Laboratories, Inc. listing label for safety and the Underwriters Laboratories classification label for sanitation.

08/2006



P.O. Box 795 • Jonesboro, GA 30237  
 Tel: 770.478.8803 • Fax: 770.471.3715  
 www.lowtempind.com • colorpoint@lowtempind.com

