

## Hot Top Table



36-CPS shown with optional single service buffet shield and cutting boards.

Item: \_\_\_\_\_

Quantity: \_\_\_\_\_

Project: \_\_\_\_\_

Date: \_\_\_\_\_

### MODELS

- 28-CPS 28 3/8"
- 36-CPS 36 3/8"
- 50-CPS 50 3/8"
- 60-CPS 60 3/8"
- 66-CPS 66 3/8"
- 74-CPS 74 3/8"
- 84-CPS 84 3/8"
- 96-CPS 96 3/8"
- 144-CPS 144 3/8"

- ▶ With optional heat lamps and pan recess, this is ideal for serving piping hot pizza slices!
- ▶ Durable, colorful molded fiberglass mobile units
- ▶ Easy to clean, low maintenance

#### Top:

- 36" Counter Top Height
- Other Height (specify \_\_\_\_\_)
- Recessed for 18x26 pans
- Top Extensions (width \_\_\_\_\_)
- Top Extensions (length \_\_\_\_\_)
- End Drop Shelf
- Partial length hot top (specify \_\_\_\_\_)

#### Tray Slide:

- Stainless Steel
- Flat Surface
- Solid "V" ridge
- Tubular
- Solid Surface
- Corian® (specify \_\_\_\_\_)
- Powder Coated brackets (specify RAL #)
- 34" Tray Slide Height
- Other Slide Height \_\_\_\_\_

#### Above the Top:

- Overshelf
- Sloped Front Protector
- Curved Front Protector
- Other Style Protector (specify \_\_\_\_\_)
- Buffet Shield Single Service
- Buffet Shield Double Service
- Lift-up Hinge for shield
- 2 tier Display Shelf, single service
- 2 tier Display Shelf, double service
- 3 tier Display Shelf, single service
- 3 tier Display Shelf, double service
- Curved Glass for Display Shelf
- Powder Coated finish (specify RAL #)
- Fluorescent Lights
- Infra-Red Lamp Strip
- Bullet Type Heat Lamps
- Infra-Red Strip with Lights

#### Base Options:

- Enclosed Base (specify EB after model #)
- Cam Operated Line-up Locks
- Hinged Doors
- Heated Storage Base
- Fiberglass Door Panels
- Custom Color (specify RAL #)
- 5" Diameter Casters
- Stainless Steel Legs
- Other \_\_\_\_\_

#### Cutting Board:

- 8" wide Stainless Steel
- 8" wide Richlite® composite
- Other width \_\_\_\_\_

#### Electrical Options:

- Convenience outlet, flush
- Convenience outlet, pedestal
- Daisy chain
- Load center

#### Other Options:

- Canopy (specify style & color)
- Over-structure with signage & lights (specify \_\_\_\_\_)
- Theme Package
  - School Bus
  - Train
  - Space Shuttle
  - Covered Wagon
  - Circus Train
  - Other (specify)




# Hot Top Table

Item: \_\_\_\_\_

Quantity: \_\_\_\_\_

Project: \_\_\_\_\_

Date: \_\_\_\_\_

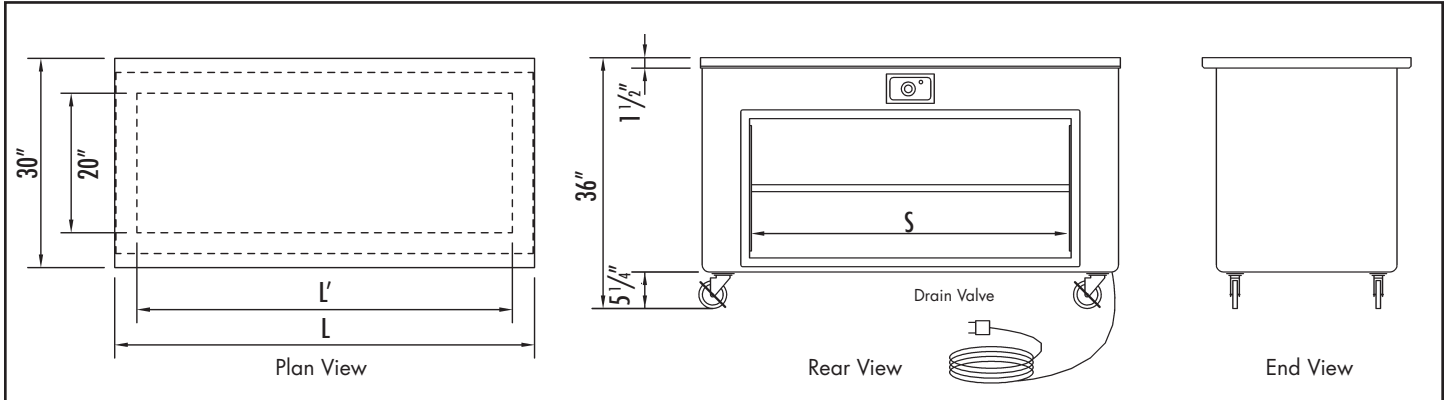

MODEL	Unit Length (L)	Heated Length (L')	Storage Length (S)	120V, 1 phase		APPROXIMATE SHIP WEIGHT
				AMPS	NEMA	
28-CPS	28 3/8"	22"	N/A	1	5-15P	150 lbs.
36-CPS	36 3/8"	30"	15"	1.3	5-15P	200 lbs.
50-CPS	50 3/8"	44"	36"	2.4	5-15P	225 lbs.
60-CPS	60 3/8"	54"	46"	2.8	5-15P	250 lbs.
66-CPS	66 3/8"	54"	46"	2.8	5-15P	275 lbs.
74-CPS	74 3/8"	68"	(2) 28"	3.7	5-15P	275 lbs.
84-CPS	84 3/8"	68"	28" & 36"	3.7	5-15P	300 lbs.
96-CPS	96 3/8"	90"	28" & 46"	4.1	5-15P	325 lbs.
144-CPS	144 3/8"	90"	(2) 46"	4.1	5-15P	400 lbs.

Adding additional electrical components will change the total electric load.

**TOP:** Top to be 30" wide and fabricated from a minimum of 14 ga. stainless steel with square turndown on all sides and corners fully welded, ground and polished. Top to have #4 satin finish and with all edges having a #7 hi-lite finish.

**BODY:** Body to be seamless molded fiberglass (F.R.P.) with smooth exterior surfaces and rounded corners. To be constructed by a hand lay-up process with four layers of 1.5 oz continuous strand fiberglass mat, plus a 24 oz layer of woven roving on the bottom for added strength. Fiberglass to be flame retardant per specification ASTM

E-162 having a flame spread of 25 or less. Body interior to be reinforced at each end with 4" wide, 12 gauge galvanized channels welded to form integral "U" frame for maximum stress relief.

Rear of body to have an open storage base made from 18-gauge stainless steel. Liner to have removable top panels to allow for service access.

**CASTERS:** 4" diameter, ball bearing, swivel type casters to be non-marking and with brakes on all wheels. Casters to be mounted thru two 12 gauge channels for extra rigidity.

**HEATED TOP:** Heated top surface to be maintained at 120 deg. F by an insulated heat blanket attached securely to the underside of the 14 gauge stainless steel top. Surface temperature to be controlled by an infinite control recessed into the fiberglass body below the top on the operator's side.

We reserve the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacement for previously purchased equipment.

All equipment to be built in accordance with the Underwriters Laboratories, Inc. and the National Sanitation Foundation, Inc. standards and shall bear the Underwriters Laboratories, Inc. listing label for safety and the Underwriters Laboratories classification label for sanitation.

08/2006



P.O. Box 795 • Jonesboro, GA 30237  
 Tel: 770.478.8803 • Fax: 770.471.3715  
 www.lowtempind.com • colorpoint@lowtempind.com

U.L. Sanitation Classified to NSF Standards

