



Solid Top 45° Wedge Filler Unit

Job: _____

Item: _____

Quantity: _____



ST-W

shown with optional cutting board, top cut-out, and stainless steel legs

Model

ST-W

Benefits:

- ▶ Upgrade directional flow in serving lines
- ▶ Molded fiberglass body to match line-up
- ▶ Makes a perfect 45° turn in any serving line
- ▶ Sanitary, easy to clean design

Standard Features


- ✓ 14 gauge stainless steel top with #7 hi-lite edges
- ✓ 4" swivel casters with brakes

Optional Features (specify)

- (A) Tray slide, stainless, solid V ridge
- (B) Tray slide, stainless, flat surface
- (D) Cutting board, 8" wide stainless steel
- (E) Cutting board, 8" wide Richlite® composite
- (AA) Cam operated line-up locks
- (SS) Stainless steel legs
- 5" swivel casters
- Cutouts, specify _____
- Special Height, specify _____



Solid Top 45° Wedge Filler Unit

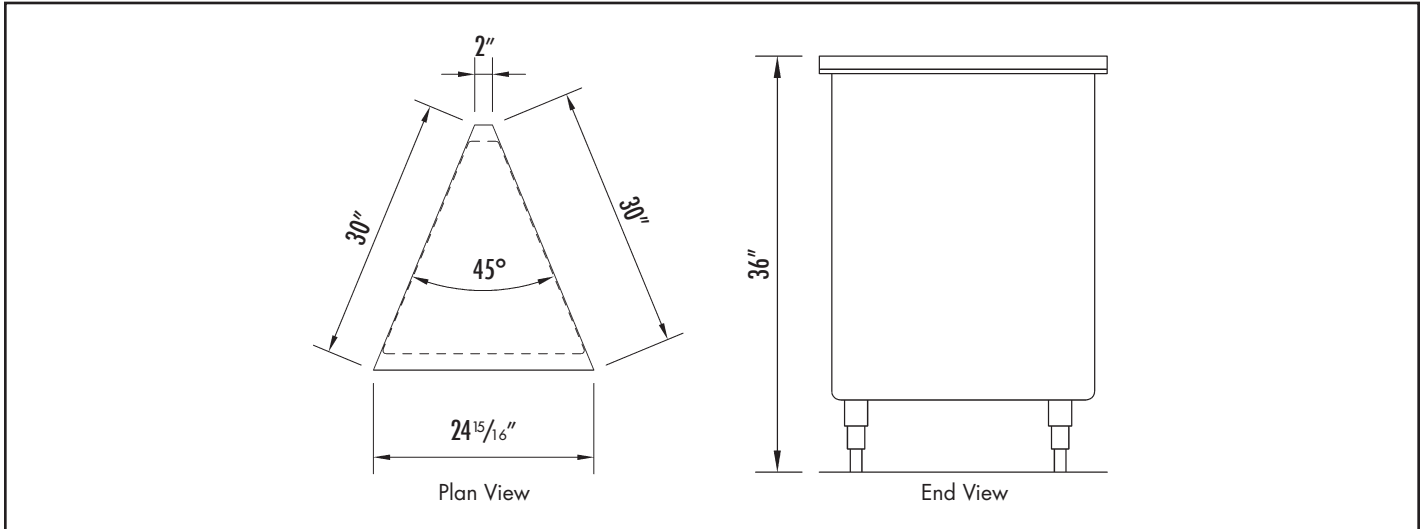

Model	L x W x H	Approx. Ship Weight
ST-W	25" x 30" x 36"	175 lbs.

General Specifications

TOP: Top to be 30" wide and fabricated from a minimum of 14 ga. stainless steel with square turndown on all sides and corners fully welded, ground and polished. Top to have #4 satin finish and with all edges having a #7 hi-lite finish.

BODY: Body to be seamless molded fiberglass (F.R.P.) with smooth exterior surfaces and rounded corners. To be constructed by a hand lay-up process with four layers of 1.5 oz continuous strand fiberglass mat,

plus a 24 oz layer of woven roving on the bottom for added strength. Fiberglass to be flame retardant per specification ASTM E-162 having a flame spread of 25 or less. Body interior to be reinforced at each end with 4" wide, 12 gauge galvanized channels welded to form integral "U" frame for maximum stress relief.

CASTERS: 4" diameter, ball bearing, swivel type casters to be non-marking and with brakes on all wheels. Casters to be mounted thru two 12 gauge channels for extra rigidity.

We reserve the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacement for previously purchased equipment.

All equipment to be built in accordance with the Underwriters Laboratories, Inc. and the National Sanitation Foundation, Inc. standards and shall bear the Underwriters Laboratories, Inc. listing label for safety and the Underwriters Laboratories classification label for sanitation.

04/2007