

Tray Stand

Item: _____

Quantity: _____

Project: _____

Date: _____



36-RTE Tray Stand shown.

MODELS

- 28-RTS side station
- 36-RTS side station

- 28-RTE end station
- 36-RTE end station

Top:

- 36" Counter Top Height
- Other Height (specify _____)
- Top Extensions (width _____)
- Top Extensions (length _____)
- Silverware Wells with inserts
- Napkin Pan

Base Options:

- Cam Operated Line-up Locks
- Custom Color (specify RAL #)
- 5" Diameter Casters
- Stainless Steel Legs
- Other _____

Other Options:

- Theme Package
 - School Bus
 - Train
 - Space Shuttle
 - Covered Wagon
 - Circus Train
 - Other (specify)

- ▶ Add silverware and napkin wells to top for space-saving versatility.
- ▶ Durable, colorful, molded fiberglass
- ▶ East to clean, low maintenance
- ▶ Labor saving mobility






Tray Stand

Item: _____

Quantity: _____

Project: _____

Date: _____

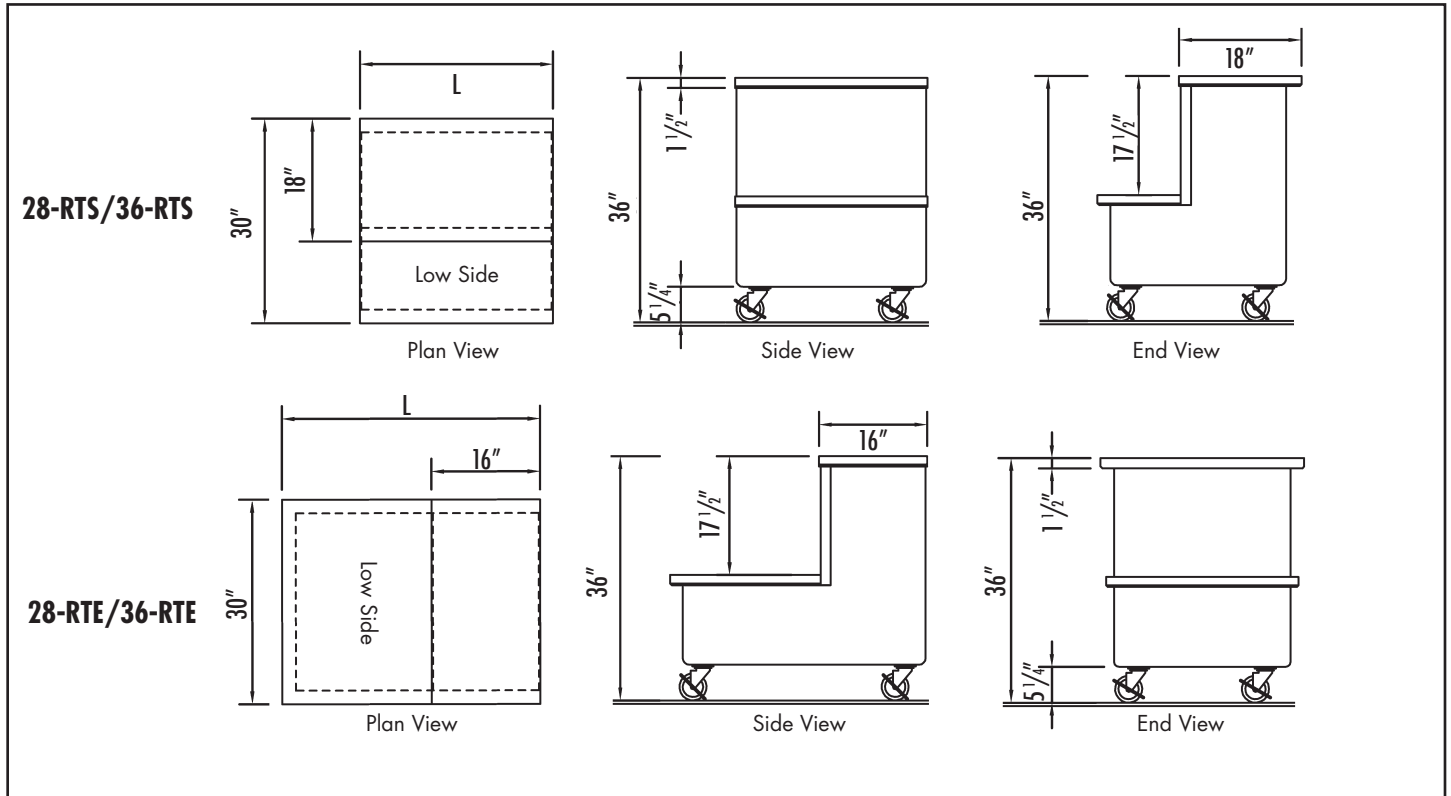

MODEL	L	APPROX. SHIP WEIGHT
28-RTS	28 3/8"	205 lbs.
36-RTS	36 3/8"	220 lbs.
28-RTE	28 3/8"	205 lbs.
36-RTE	36 3/8"	220 lbs.

TOP: Top and platform to be 30" wide and fabricated from a minimum of 14 ga. stainless steel with square turndown on all sides and corners fully welded, ground and polished. Top to have #4 satin finish and with all edges having a #7 hi-lite finish.

BODY: Body to be seamless molded fiberglass (F.R.P.) with smooth exterior surfaces and rounded corners. To be constructed by a hand lay-up process with four layers of 1.5 oz continuous strand fiberglass mat, plus a 24 oz layer of woven roving on the

bottom for added strength. Fiberglass to be flame retardant per specification ASTM E-162 having a flame spread of 25 or less. Body interior to be reinforced at each end with 4" wide, 12 gauge galvanized channels welded to form integral "U" frame for maximum stress relief.

CASTERS: 4" diameter, ball bearing, swivel type casters to be non-marking and with brakes on all wheels. Casters to be mounted thru two 12 gauge channels for extra rigidity.

We reserve the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacement for previously purchased equipment.

All equipment to be built in accordance with the Underwriters Laboratories, Inc. and the National Sanitation Foundation, Inc. standards and shall bear the Underwriters Laboratories, Inc. listing label for safety and the Underwriters Laboratories classification label for sanitation.

05/2006



P.O. Box 795 • Jonesboro, GA 30237
 Tel: 770.478.8803 • Fax: 770.471.3715
 www.lowtempind.com • colorpoint@lowtempind.com

