

Super Efficient-Super-Hot

New Energy Saver Heating Source

D R O P - I N S



JOB _____ ITEM # _____

MODEL # PANS

DI-EF-1	1
DI-EF-2	2
DI-EF-3	3
DI-EF-4	4
DI-EF-5	5
DI-EF-6	6



BENEFITS

- NEW 500 Watt (@208V) Heat Source
- NEW individual Solid State Controls
- Versatile, use Wet or Dry
- Fully insulated for use in any counter
- 1 to 6 pan units provide for full menus
- Manifold drains make installation easy
- Single electrical connection
- Fast, easy installation
- Labor saving “easy to clean” design
- Connect to 208V (500 watt) or 120V, 240V (661 watt) (with appropriate controller)

STANDARD FEATURES

- Solid State Digital Controls
- 208V, 120V, or 240V (specify)
- Single power supply
- Easy installation
- Each compartment drain manifolded to a common outlet

OPTIONAL FEATURES

- Small pan divider bars
- Adapter panel (specify)
- Other Voltage, Phase, Cycle
- NSF approved food protectors (contact factory)

The Drop-In configuration provides a self contained design that allows easy installation in any counter, serving line, cart or table.

SHORT FORM SPECIFICATIONS

Top perimeter frame to be constructed of 14 gauge stainless steel, welded, ground and polished, with a thermal break provided between the top and heated sections. Interior pan to be 18 gauge stainless steel, deep drawn, with coved corners. To be fully insulated with fiberglass insulation. The exterior jacket to be constructed of 18 gauge galvanized steel. Each compartment to have 500 watt heat source with solid state digital controls.

All switches and controls to be fully accessible.

Units to be UL listed and shall bear the UL and UL Sanitation seals.





**U.L. Sanitation
Classified to
NSF Standards**



Low Temp Industries, Inc.
P.O.Box 795, Jonesboro, GA 30237
Phone 770 478-8803, Fax 770 471-3715

www. lowtempind.com
info@lowtempind.com

Hot Food Well Drop-Ins

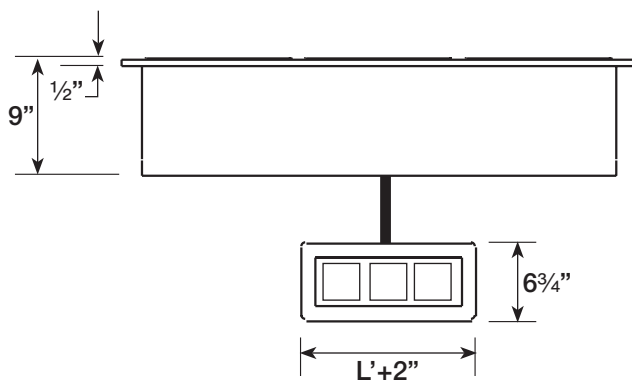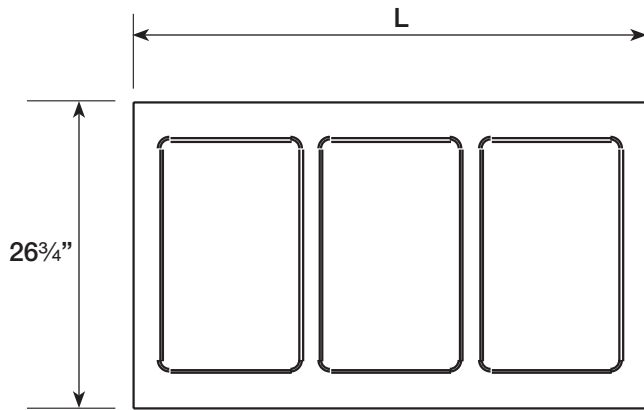

Model No.	DIM L	DIM L'	CUT-OUT
DI-EF-1	16 1/2"	4 5/8"	22 5/8" x 14 1/4"
DI-EF-2	30 1/2"	8 1/8"	22 5/8" x 28 1/4"
DI-EF-3	44 1/2"	11 5/8"	22 5/8" x 42 1/4"
DI-EF-4	58 1/2"	15 1/8"	22 5/8" x 56 1/4"
DI-EF-5	72 1/2"	18 5/8"	22 5/8" x 70 1/4"
DI-EF-6	86 1/2"	22 1/8"	22 5/8" x 84 1/4"

DROP-INS Hot Food Wells Electric Specs.

Drop-ins Model No.	208V, 1 PHASE		120V, 1 PHASE			240V, 1 PHASE		
	Watts 208V/1	Amps 208V/1	Watts 120V	Amps 120V		Watts 240V/1	Amps 240V/1	
DI-EF-1	500	2.4	661	5.5		661	2.8	
DI-EF-2	1000	4.8	1322	11.0		1322	5.5	
DI-EF-3	1500	7.2	1983	16.5		1983	8.3	
DI-EF-4	2000	9.6	2644	22.0		2644	11.0	
DI-EF-5	2500	12.0	3305	27.5		3305	13.8	
DI-EF-6	3000	14.4	3966	33.1		3966	16.5	



LOW TEMP

We reserve the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacement for previously purchased equipment.

Low Temp Industries, Inc.
P.O. Box 795, Jonesboro, GA 30237
Phone 770 478-8803, Fax 770 471-3715