



Drop-In

Pass-Thru Display Refrigerator

Job: _____

Item: _____

Quantity: _____



Drop-In Models

	length
<input type="checkbox"/> CSDR-DI-42 P	42 1/4"
<input type="checkbox"/> CSDR-DI-42 S	42 1/4"
<input type="checkbox"/> CSDR-DI-60 P	60 1/4"
<input type="checkbox"/> CSDR-DI-60 S	60 1/4"

Benefits:

- ▶ Seamless welded stainless steel construction
- ▶ Easy to load
- ▶ Large capacity
- ▶ Adjustable shelves
- ▶ Interior lights provide product visibility
- ▶ Powder coated to match your décor (see options)

Standard Features

- ✓ Self-closing doors (front & back)
- ✓ Digital solid-state temperature controller
- ✓ Door locks
- ✓ 4 Heavy duty stainless steel shelves
- ✓ 4 recessed interior fluorescent lights
- ✓ Self-contained refrigeration system
- ✓ Double service design (suffix P)

Optional Features (specify)

- Single service (suffix S)
- Glass or mirror inside back (single service only)
- Remote refrigeration system
- Lighted signs and graphics (specify) _____
- Powder coated exterior (specify) _____

Performance

These Heavy Duty, versatile units are designed to maintain proper holding temperatures and provide fast, efficient loading and rapid product delivery. Full sized sliding glass doors provide easy access and help maintain approved temperatures. Interior is easy to clean, and interior lights maximize product presentation. Drop-in design provides clean, easy installation.






Drop-In Pass-Thru Display Refrigerator

Job: _____

Item: _____

Quantity: _____

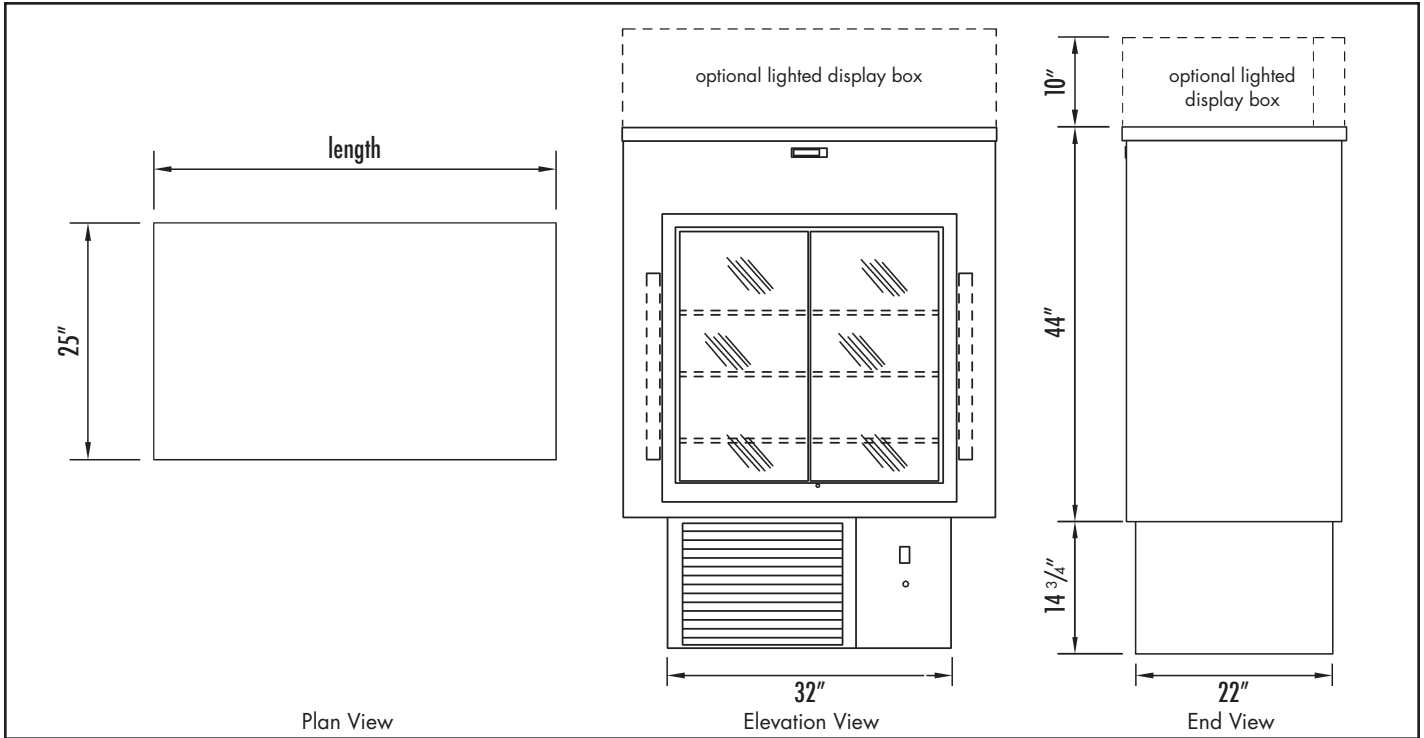

Model	Length	Height	Height w/comp housing	Depth	Cut-Out	Comp.	120V/1 phase		Ship Weight
							Amps	Plug	
CSDR-DI-42 P	42 1/4"	44"	58 3/4"	25"	32 3/8" x 22 3/8"	1/2 H.P.	16	5-20P	400 lbs.
CSDR-DI-42 S	42 1/4"	44"	58 3/4"	25"	32 3/8" x 22 3/8"	1/2 H.P.	16	5-20P	400 lbs.
CSDR-DI-60 P	60 1/4"	44"	58 3/4"	25"	32 3/8" x 22 3/8"	1/2 H.P.	16	5-20P	480 lbs.
CSDR-DI-60 S	60 1/4"	44"	58 3/4"	25"	32 3/8" x 22 3/8"	1/2 H.P.	16	5-20P	480 lbs.

General Specifications

Body To be fully insulated with a seamless 16 gauge stainless steel, welded, ground and polished exterior.

Interior to be a 20 gauge welded stainless steel liner, and to contain 4 recessed flourescent lights

Doors Insulated, self-closing glass doors front and back (except on single service units) with plunger style locks, and to include 4 stainless steel wire shelves mounted on stainless steel pilasters and clips.

Refrigeration system to be 1/2 HP air-cooled, hermetically sealed condensing unit fully connected and tested, ready to plug in.

It shall be mounted on a channel base, and system will include 2 each 16"x16" louvered access panels of 18 gauge stainless steel. Louvered panels must be installed in base unit (by others) to allow straight-through air flow. **NOTE:** Cut-out opening must be reinforced to support the weight of display refrigerator and product load.

We reserve the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacement for previously purchased equipment.

All equipment to be built in accordance with the Underwriters Laboratories, Inc. and the National Sanitation Foundation, Inc. standards and shall bear the Underwriters Laboratories, Inc. listing label for safety and the Underwriters Laboratories classification label for sanitation.

05/2007



P.O. Box 795 • Jonesboro, GA 30237
Tel: 770.478.8803 • Fax: 770.471.3715
www.lowtempind.com • colorpoint@lowtempind.com

U.L. Sanitation Classified to NSF Standards

