Beverage Table

Stainless Steel (S) or Laminate Panel (L)



96-BT-L shown with option: (A) beaded stainless steel tray slide.

COLORPOINT

Project:	
Item:	
Quantity:	
Date:	

Models	Length
□ 28-BT-L/S	28 3/8"
☐ 36-BT-L/S	36 3/8"
□ 50-BT-L/S	50 3/8"
□ 60-BT-L/S	60 3/8"
□ 66-BT-L/S	66 3/8"
□ 74-BT-L/S	74 3/8"
■ 84-BT-L/S	84 3/8"
■ 96-BT-L/S	96 3/8"
□ 144-BT-L/S	144 3/8"

Standard Features

- √ 30" wide 14 gauge stainless steel top
- ✓ Stainless steel or laminate panel body
- ✓ Drain trough
- ✓ Open Storage Base
- √ 5" Locking Swivel Casters

Тор
☐ Height other than standard 36"
(specify)
☐ (TEW) Top Extensions
(width)
☐ (TEL) Top Extensions
(length)
☐ (CT) Corian® Top
(specify)
☐ (QT) Stone Top
(specify)
☐ (AA) Cam Operated Line-up Locks
☐ (FF) End Drop Shelf
☐ Drop-in (Specify)
Above the Top
☐ (F) Overshelf
☐ (I) 2 tier Display Shelf, single service
(12) 2 tier Display Shelf, double service
Powder Coated Posts and Hardware

Tray Slide/Cutting Board Options

- ☐ (A) Beaded, stainless steel
- ☐ (B) Flat Surface, stainless steel
- lacksquare (C) Tubular Solid Surface, stainless steel
- ☐ (CTS) Corian® Tray Slide (specify ____
- ☐ (QTS) Stone Tray Slide (specify ___
- ☐ Powder Coated brackets (specify RAL #
- ☐ (D) 8" wide Stainless Steel cutting board
- ☐ (E) 8" wide Richlite® composite cutting board
- ☐ Other cutting board width (specify___

Base Options

- ☐ (EB) Enclosed Base no under storage
- ☐ (Y) Hinged Doors
- ☐ (BB) Heated Base
- ☐ (CC) Refrigerated Base
- ☐ (MM) Vertical Trim Strips
- ☐ (SS) Stainless Steel Legs
- ☐ (OP) Offset Panels
- Powder Coat Louvers
- (specify RAL #____
- ☐ S/S Toe Kick (TC)
- ☐ (IU) Intermediate Under-shelf
- Other _____

- ➤ Versatile counters, add the options you need!
- ➤ Attractive, colorful, laminate
- Easy to clean, low maintenance

Plumbing & Electrical Options

- ☐ (DD) Convenience outlet, flush
- ☐ (EE) Convenience outlet, pedestal
- ☐ (DC) Daisy chain
- ☐ (LC) Load center
- ☐ Alternate Drain Location

Other Options (Contact Factory)

- ☐ Vinyl Graphic Wrap (not available for Laminate Panel body type)
- Body Decal
- ☐ Canopy (specify style & color)
- ☐ Over-structure with signage & lights (specify
- ☐ Digital Menu Boards
- ☐ Progressions Décor Panel



(specify RAL #____)

☐ (RR) LED Lights

T 770 478 8803 LTI. Inc. P.O. Box 795 **F** 770 471 3715 Jonesboro, GA 30237 **W** lowtempind.com








Beverage Table

COLORPOINT

Stainless Steel (S) or Laminate Panel (L)

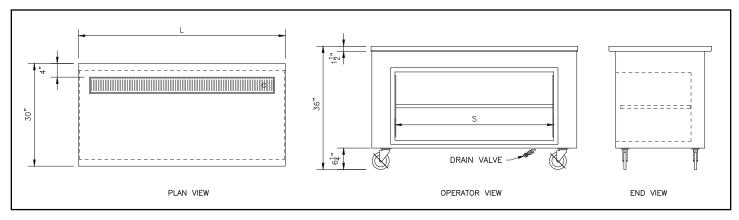

Model	L	S	Approx. Ship Weight
28-BT	28 3/8"	N/A	205 lbs.
36-BT	36 ^{3/8} "	15"	220 lbs.
50-BT	50 ^{3/8} "	36"	260 lbs.
60-BT	60 ^{3/8} "	46"	300 lbs.
66-BT	66 ^{3/8} "	46"	320 lbs.
74-BT	74 ^{3/8} "	(2) 28"	340 lbs.
84-BT	84 3/8"	28" & 36"	360 lbs.
96-BT	96 ^{3/8} "	28" & 46"	380 lbs.
144-BT	144 ^{3/8} "	(2) 46"	750 lbs.

Top

Top to be 30" wide and fabricated from a minimum of 14 gauge stainless steel with square turndown on all sides and corners fully welded, ground and polished. Top to have #4 satin finish and with all edges having a #7 hi-lite finish.

Body (S)

Uni-body structure, fabricated from 18 gauge stainless steel, welded ground and polished. Interior reinforced with 12 gauge galvanized uprights to support shelving and a 20 gauge steel bottom.

Body (L)

Standard grade laminate to cover all sides of an 18 gauge steel uni-body structure. Interior reinforced with 12 gauge galvanized uprights to support shelving and a 20 gauge steel bottom. Corners and bottom edge provided with ½" stainless steel trim strips.

Casters

5" diameter, ball bearing, swivel type casters to be non-marking and with brakes on all wheels. Casters to be mounted with exterior and interior bracing for maximum stress relief.

Drain Trough

LTI. Inc.

P.O. Box 795

Jonesboro, GA 30237

14 ga. stainless steel drain trough welded into top and fitted with a removable stainless steel anti splash grid. Trough to slope to 1" open brass drain and extend to shut off valve located below base.

We reserve the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacement for previously purchased equipment.

All equipment to be built in accordance with the Underwriters Laboratories. Inc. and the National Sanitation Foundation, Inc. standards and shall bear the Underwriters Laboratories, Inc. listing label for safety and the Underwriters Laboratories classification label for sanitation.

T 770 478 8803

F 770 471 3715

 ${\bf W}$ lowtempind.com







REV 3/23/17