

Cashier Station

Stainless Steel (S) or Laminate Panel (L)



36-CSE-L shown with options: (A) beaded stainless steel tray slide, and (HH) locking cash drawer.

Project: _____

Item: _____

Quantity: _____

Date: _____

Models

- 28-CSE-L/S - end station
- 36-CSE-L/S - end station
- 50-CSE-L/S - end station
- 60-CSE-L/S - end station
- 66-CSE-L/S - end station
- 74-CSE-L/S - end station
- 28-CSS-L/S - side station
- 36-CSS-L/S - side station
- 50-CSS-L/S - side station
- 60-CSS-L/S - side station
- 66-CSS-L/S - side station
- 74-CSS-L/S - side station

Standard Features

- ✓ 30" wide 14 gauge stainless steel top
- ✓ Tubular footrest
- ✓ 5" Locking Swivel Casters

Top

- Height other than standard 36" (specify _____)
- (TEW) Top Extensions (width____)
- (TEL) Top Extensions (length ____)
- (FF) End Drop Shelf
- Drop-in (Specify_____)
- Keypad bracket

Above the Top (50" and longer units)

- (F) Overshelf
- (G) Sloped Front Protector
- (GA) Sloped Front Protector, Adjustable
- (GAG) Sloped Front Protector - Adjustable - Glass Top Shelf
- (GC) Sloped Front Protector, Glass Clips
- (GCG) Sloped Front Protector - Glass Clips - Glass Top Shelf
- (M) Buffet Shield Single Service Hinged
- (N) Buffet Shield Double Service Hinged
- (GTS) Glass Top Shelf for Protector or Buffet Shield
- (I) 2 tier Display Shelf, single service
- (I2) 2 tier Display Shelf, double service
- (CCP) Curved Tempered Glass Protector
- (SCP) Straight Tempered Glass Protector
- (CCB) Curved Tempered Glass Buffet Shield

- Powder Coated finish (specify RAL #_____)
- (RR) LED Lights
- (S) Infra-Red Heat Lamp Strip
- (U) Infra-Red Heat Strip with Lights

Tray Slide/Cutting Board Options

- (A) Beaded, stainless steel tray slide
- (B) Flat Surface, stainless steel tray slide
- (C) Tubular Solid Surface, stainless steel tray slide
- (CTS) Corian® Tray Slide (specify _____)
- (QTS) Stone Tray Slide (specify _____)
- Powder Coated brackets (specify RAL #_____)
- (D) 8" wide Stainless Steel cutting board
- (E) 8 wide Richlite® composite cutting board
- Other cutting board width (specify_____)

Plumbing & Electrical Options

- (DD) Convenience outlet, flush
- (EE) Convenience outlet, pedestal
- (DC) Daisy chain
- (LC) Load center

Base Options

- (AA) Cam Operated Line-up Locks
- (Y) Hinged Doors
- (MM) Vertical Trim Strips
- (SS) Stainless Steel Legs
- Slide-out shelf
- Locking cabinet
- Security cover

► Versatile counters, add the options you need!

► Easy to clean, low maintenance

► 50" and longer units can contain a drop-in freezer/merchandise or display shelves for added versatility.

- Powder Coat Louvers (specify RAL #_____)
- S/S Toe Kick
- (IU) Intermediate Undershelf
- Other _____

Cash Drawer Options


- (HH) Locking Cash Drawer
- Plastic cash tray
- Other (specify _____)

Other Options

- Vinyl Graphic Wrap
- Body Decal
- Canopy (specify style & color)
- Over-structure with signage & lights (specify_____)
- Digital Menu Boards
- Progressions Décor Panel

Cashier Station

Stainless Steel (S) or Laminate Panel (L)

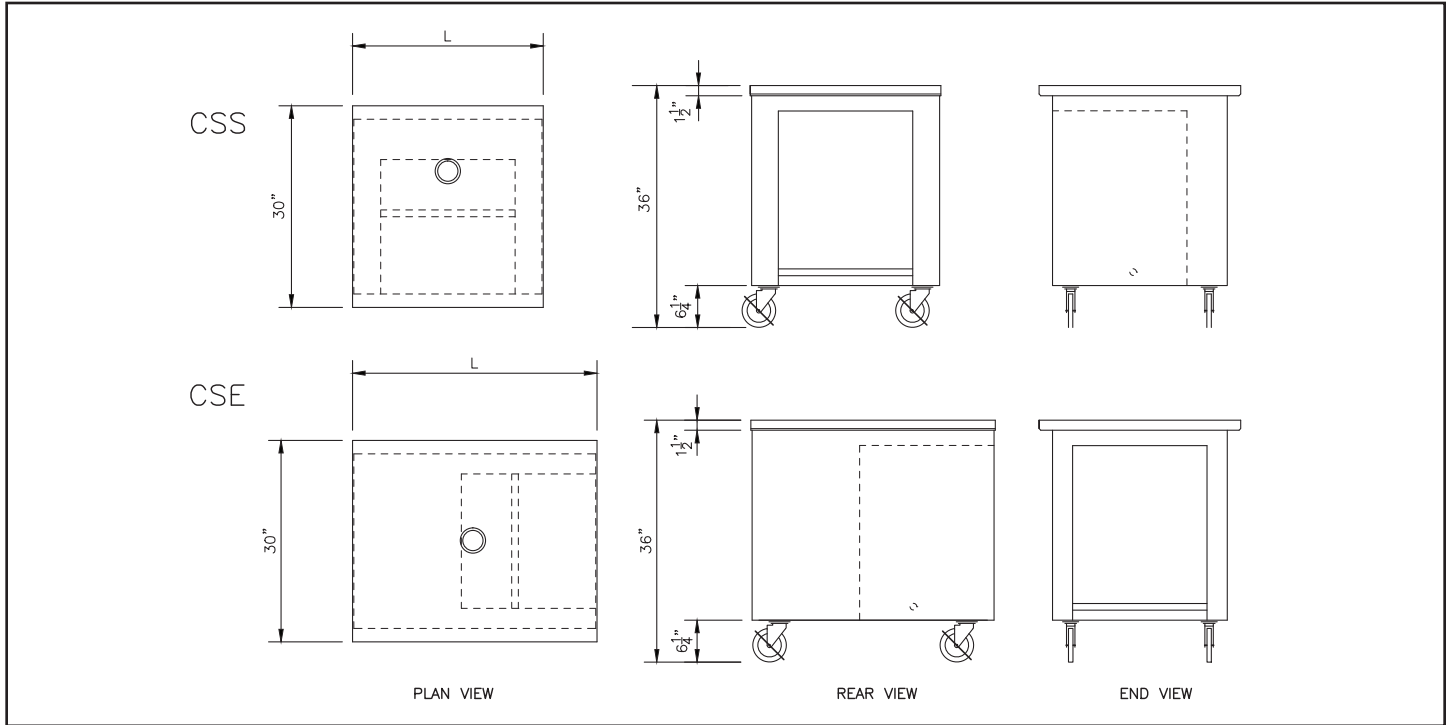

CSE Models	L	S*	APPROX. SHIP WEIGHT
28-CSE	28 3/8"	N/A	205 lbs.
36-CSE	36 3/8"	N/A	260 lbs.
50-CSE	50 3/8"	15"	320 lbs.
60-CSE	60 3/8"	28"	440 lbs.
66-CSE	66 3/8"	36"	480 lbs.
74-CSE	74 3/8"	46"	540 lbs.

CSS Models	L	S (optional)	APPROX. SHIP WEIGHT
28-CSS	28 3/8"	N/A	205 lbs.
36-CSS	36 3/8"	N/A	260 lbs.
50-CSS	50 3/8"	15"	320 lbs.
60-CSS	60 3/8"	28"	440 lbs.
66-CSS	66 3/8"	36"	480 lbs.
74-CSS	74 3/8"	46"	540 lbs.

* Represents optional storage compartment mounted in 50" or longer units.

Top

Top to be 30" wide and fabricated from a minimum of 14 ga. stainless steel with square turndown on all sides and corners fully welded, ground and polished. Top to have #4 satin finish and with all edges having a #7 hi-lite finish.

Body (S)

Uni-body structure, fabricated from 18 gauge stainless steel, welded ground and polished. Interior reinforced with 12 gauge galvanized uprights to support shelving and a 20 gauge steel bottom.

Body (L)

Standard grade laminate to cover all sides of an 18 gauge steel uni-body structure. Interior reinforced with 12 gauge galvanized uprights to support shelving and a 20 gauge steel bottom. Corners and bottom edge provided with 1/2" stainless steel trim strips.

Casters

5" diameter, ball bearing, swivel type casters to be non-marking and with brakes on all wheels. Casters to be mounted with exterior and interior bracing for maximum stress relief.

We reserve the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacement for previously purchased equipment.

All equipment to be built in accordance with the Underwriters Laboratories, Inc. and the National Sanitation Foundation, Inc. standards and shall bear the Underwriters Laboratories, Inc. listing label for safety and the Underwriters Laboratories classification label for sanitation.