

Tubular Tray, Silverware, and Napkin Dispenser



CPM-NST-2-1014

Project: _____

Item: _____

Quantity: _____

Date: _____

Models

Tray Size

- | | |
|---|-------------------|
| <input type="checkbox"/> CPM-NST-2-1014 | 10" x 14" |
| <input type="checkbox"/> CPM-NST-2-1216 | 12 1/4" x 14 1/2" |
| <input type="checkbox"/> CPM-NST-2-1418 | 14" x 18" |
| <input type="checkbox"/> CPM-NST-2-1520 | 15 1/2" x 20 1/2" |
| <input type="checkbox"/> CPM-NST-2-1622 | 16" x 22" |
| <input type="checkbox"/> CPM-NST-2-1821 | 17 1/2" x 21" |

Standard Features


- ✓ Self-leveling dispenser
- ✓ Corner bumpers
- ✓ 4" swivel casters with brakes

Optional Features (specify)

- (TT) Wrap-around bumpers
- 5" Swivel casters

- ▶ Heavy duty stainless steel construction
- ▶ Large capacity
- ▶ Sizes to fit virtually all trays
- ▶ Mobile, easy to move from dish-room to serving area
- ▶ Easy to clean design

Tubular Tray, Silverware, and Napkin Dispenser

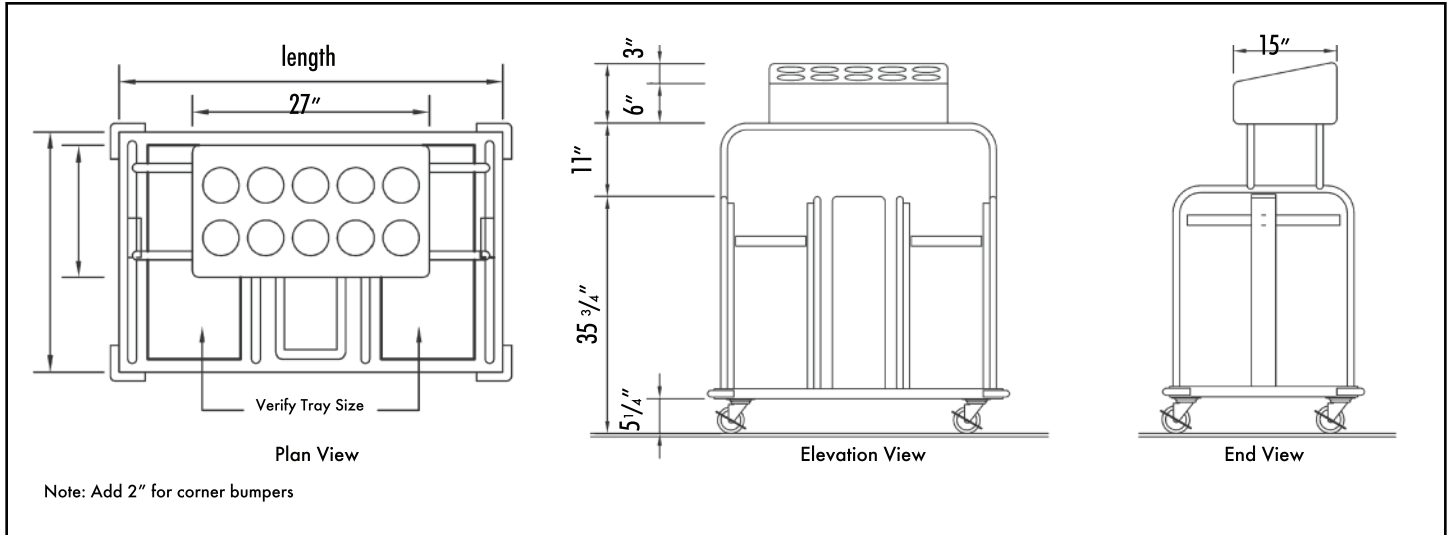

Model	Length x Width x Height	Tray Size	Tray Capacity*	Tray Stacks	Approx. Ship Weight
CPM-NST-2-1014	43 ³ / ₄ " x 27 ¹ / ₄ " x 55 ³ / ₄ "	10" x 14"	300	2	125 lbs.
CPM-NST-2-1216	47 ³ / ₄ " x 27 ¹ / ₄ " x 55 ³ / ₄ "	12 ¹ / ₄ " x 16 ¹ / ₂ "	300	2	140 lbs.
CPM-NST-2-1418	51 ³ / ₄ " x 27 ¹ / ₄ " x 55 ³ / ₄ "	14" x 18"	300	2	176 lbs.
CPM-NST-2-1520	54 ¹ / ₂ " x 27 ¹ / ₄ " x 55 ³ / ₄ "	15 ¹ / ₄ " x 20 ¹ / ₂ "	300	2	178 lbs.
CPM-NST-2-1622	56 ¹ / ₂ " x 27 ¹ / ₄ " x 55 ³ / ₄ "	16" x 22"	300	2	188 lbs.
CPM-NST-2-1821	60 ¹ / ₂ " x 27 ¹ / ₄ " x 55 ³ / ₄ "	17 ¹ / ₂ " x 21"	300	2	192 lbs.

* Tray capacity may vary depending on stacking height of trays.

NOTE: When ordering, please verify exact length, width, weight of one tray for proper calibration.

Base and Frame

Base to be fabricated from a minimum of 14 gauge stainless steel with all sides turned square with all corners fully welded, ground and polished. Underside reinforced with heavy gauge channels. Base to have non-marking corner bumpers. Frame shall be constructed of 1" O.D. 16 gauge stainless steel tubing bolted to the base.

Casters

4" diameter, ball bearing, swivel type casters to be non-marking and with brakes on all wheels.

We reserve the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacement for previously purchased equipment.

Silverware Dispenser

Silverware container shall be seamless molded fiberglass (F.R.P.) with smooth exterior and interior surfaces and rounded corners. Sloped top to have ten (10) cut outs complete with nylon silverware cylinders. All fiberglass to be flame retardant per specification ASTM E-162 having a flame spread of 25 or less. Silverware container to be secured to tray stand frame by 1" 16 gauge stainless steel tubing.

All equipment to be built in accordance with the Underwriters Laboratories, Inc. and the National Sanitation Foundation, Inc. standards and shall bear the Underwriters Laboratories, Inc. listing label for safety and the Underwriters Laboratories classification label for sanitation.