Tubular Tray Stand





Quant	ity: _		
Date:			_

Project:

CPM-MTS shown with optional napkin dispenser holders

Models Tray Capacity

☐ CPM-MTS 300*

Standard Features

- √ Silverware dispenser
- √ Corner bumpers
- √ 4" swivel casters with brakes

Optional Features (specify)

- ☐ (PP) Napkin dispenser
- ☐ (SS) Stainless steel legs
- ☐ (TT) Wrap-around bumpers
- ☐ 5" Swivel casters

- ► Heavy duty stainless steel construction
- ► Large capacity
- ➤ Sizes to fit virtually all trays
- ► Mobile, easy to move from dish-room to serving area
- Easy to clean design








REV 11/11/16

Tubular Tray Stand



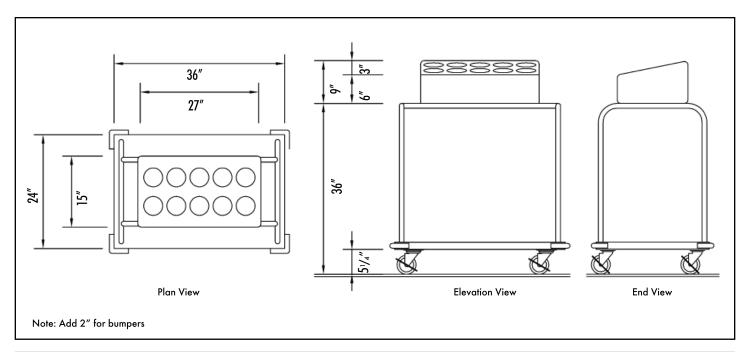

Model	LxWxH	Tray Capacity*	Approx. Ship Weight
CPM-MTS	36" x 24" x 48"	300	132 lbs.

^{*} Tray capacity may vary depending on stacking height of trays

Base and Frame

Base to be fabricated from a minimum of 14 gauge stainless steel with all sides turned square with all corners fully welded, ground and polished. Underside reinforced with heavy gauge channels. Base to have non-marking corner bumpers. Frame shall be constructed of 1" O.D. 16 gauge stainless steel tubing bolted to the base.

Silverware Dispenser

Silverware container shall be seamless molded fiberglass (F.R.P.) with smooth exterior and interior surfaces and rounded corners. Sloped top to have ten (10) cut outs complete with nylon silverware cylinders. All fiberglass to be flame retardant per specification ASTM E-162 having a flame spread of 25 or less. Silverware container to be secured to tray stand frame by 1" 16 gauge stainless steel tubing.

Casters

LTI, Inc.

P.O. Box 795

Jonesboro, GA 30237

4" diameter, ball bearing, swivel type casters to be non-marking and with brakes on all wheels.

We reserve the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacement for previously purchased equipment.

All equipment to be built in accordance with the Underwriters Laboratories. Inc. and the National Sanitation Foundation, Inc. standards and shall bear the Underwriters Laboratories, Inc. listing label for safety and the Underwriters Laboratories classification label for sanitation

T 770 478 8803

F 770 471 3715

 ${\bf W}$ lowtempind.com





