

# Solid Top Food Table

## Molded Fiberglass (F)



66-ST-F shown with options: (A) Beaded, stainless steel tray slide and (I) 2 tier display shelf, single service protector

**Project:** \_\_\_\_\_

**Item:** \_\_\_\_\_

**Quantity:** \_\_\_\_\_

**Date:** \_\_\_\_\_

Models	Length
--------	--------

<input type="checkbox"/> 28-ST-F	28 3/8"
<input type="checkbox"/> 36-ST-F	36 3/8"
<input type="checkbox"/> 50-ST-F	50 3/8"
<input type="checkbox"/> 60-ST-F	60 3/8"
<input type="checkbox"/> 66-ST-F	66 3/8"
<input type="checkbox"/> 74-ST-F	74 3/8"
<input type="checkbox"/> 84-ST-F	84 3/8"
<input type="checkbox"/> 96-ST-F	96 3/8"
<input type="checkbox"/> 144-ST-F	144 3/8"

### Standard Features

- ✓ 30" wide 14 gauge stainless steel top
- ✓ Molded fiberglass body
- ✓ Open Storage Base
- ✓ 5" Locking Swivel Casters

### Top Options

- Height other than std. 36" (specify \_\_\_\_\_)
- (RE) Recess for 18" x 26" pans
- (TEW) Top Extensions (width \_\_\_\_\_)
- (TEL) Top Extensions (length \_\_\_\_\_)
- (CT) Corian® Top (specify \_\_\_\_\_)
- (QT) Stone Top (specify \_\_\_\_\_)
- (AA) Cam Operated Line-up Locks
- (FF) End Drop Shelf

### Above the Top

- (F) Overshelf
- (GA) Sloped Front Protector, Adjustable
- (GAG) Sloped Front Protector - Adjustable - Glass Top Shelf
- (GC) Sloped Front Protector, Glass Clips
- (GCG) Sloped Front Protector - Glass Clips - Glass Top Shelf
- (M) Buffet Shield Single Service Hinged
- (N) Buffet Shield Double Service Hinged
- (GTS) Glass Top Shelf for Protector or Buffet Shield
- (I) 2 tier Display Shelf, single service
- (I2) 2 tier Display Shelf, double service
- (CCP) Curved Tempered Glass Protector
- (SCP) Straight Tempered Glass Protector

- (CCB) Curved Tempered Glass Buffet Shield
- Powder Coated finish (specify RAL # \_\_\_\_\_)
- (RR) LED Lights
- (S) Infra-Red Lamp Strip
- (U) Infra-Red Strip with Lights

### Tray Slide/Cutting Boards

- (A) Beaded, stainless steel tray slide
- (B) Flat Surface, stainless steel tray slide
- (C) Tubular stainless steel tray slide
- (CTS) Corian® Tray Slide (specify \_\_\_\_\_)
- (QTS) Stone Tray Slide (specify \_\_\_\_\_)
- Powder Coated brackets (specify RAL # \_\_\_\_\_)
- (D) 8" wide Stainless Steel cutting board
- (E) 8" wide Richlite® composite cutting board
- Other cutting board width (specify \_\_\_\_\_)

### Base Options

- (EB) Enclosed Base - no under storage
- (Y) Hinged Doors
- (BB) Heated Storage Base
- (CC) Refrigerated Storage Base (36 high units only)
- (NN) Fiberglass Door Panels
- (MM) Vertical Trim Strips
- (SS) Stainless Steel Legs
- (OP) Offset Panels

- ▶ Most versatile counters, add the options you need!
- ▶ Durable, colorful, molded fiberglass
- ▶ Easy to clean, low maintenance
- ▶ 12' (144-ST) unit can be made into a complete reimbursable line.

- Custom Body Color (specify RAL # \_\_\_\_\_)
- S/S Toe Kick
- (IU) Intermediate Undershelf
- Other \_\_\_\_\_

### Plumbing & Electrical Options


- (DD) Convenience outlet, flush
- (EE) Convenience outlet, pedestal
- (DC) Daisy chain
- (LC) Load center

### Other Options (Contact Factory)

- Vinyl Graphic Wrap
- Body Decal
- Canopy (specify style & color)
- Over-structure with signage & lights (specify \_\_\_\_\_)
- Digital Menu Boards
- Progressions Décor Panel

# Solid Top Food Table

## Molded Fiberglass (F)

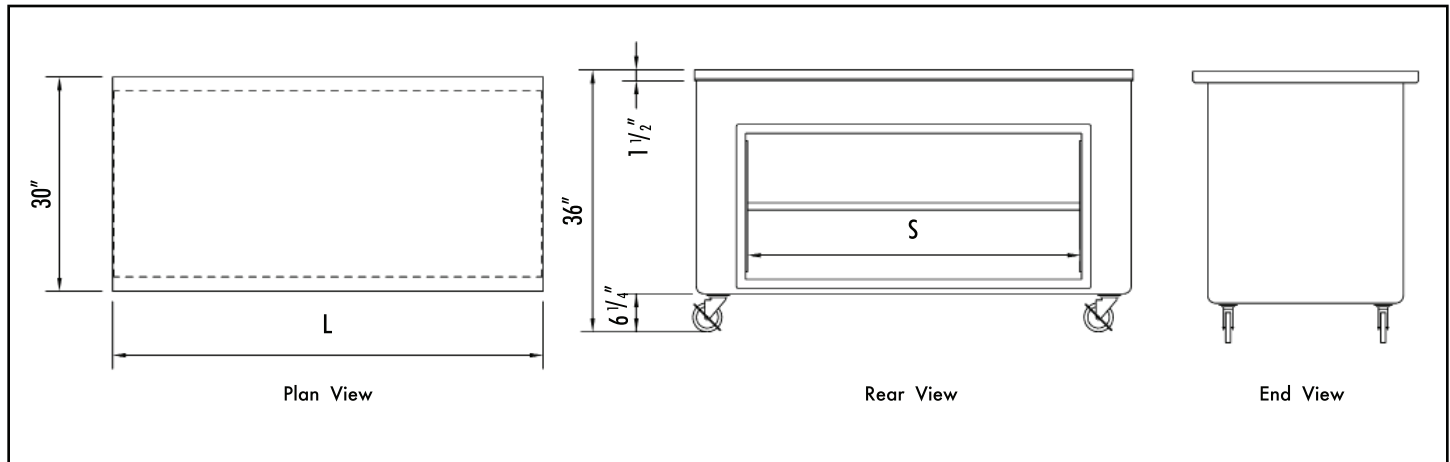

Model	L	S	Approx. Ship Weight
28-ST	28 3/8"	N/A	205 lbs.
36-ST	36 3/8"	15"	220 lbs.
50-ST	50 3/8"	36"	260 lbs.
60-ST	60 3/8"	46"	300 lbs.
66-ST	66 3/8"	46"	320 lbs.
74-ST	74 3/8"	(2) 28"	340 lbs.
84-ST	84 3/8"	28" & 36"	360 lbs.
96-ST	96 3/8"	28" & 46"	380 lbs.
144-ST	144 3/8"	(2) 46"	750 lbs.

### Top

Top to be 30" wide and fabricated from a minimum of 14 ga. stainless steel with square turndown on all sides and corners fully welded, ground and polished. Top to have #4 satin finish and with all edges having a #7 hi-lite finish.

### Body (F)

Body to be seamless molded fiberglass (F.R.P.) with smooth exterior surfaces and rounded corners. To be constructed by a hand lay-up process with four layers of 1.5 oz continuous strand fiberglass mat, plus a 24 oz layer of woven roving on the bottom for added strength. Fiberglass to be flame retardant per specification ASTM E-162 having a flame spread of 25% or less. Body interior to be reinforced at each end with 4" wide, 12 gauge galvanized channels welded to form integral U frame for maximum stress relief.

### Castors

5" diameter, ball bearing, swivel type castors to be non-marking and with brakes on all wheels. Castors to be mounted thru two 12 gauge channels for extra rigidity.

We reserve the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacement for previously purchased equipment.

All equipment to be built in accordance with the Underwriters Laboratories, Inc. and the National Sanitation Foundation, Inc. standards and shall bear the Underwriters Laboratories, Inc. listing label for safety and the Underwriters Laboratories classification label for sanitation.