



Project: \_\_\_\_\_

Item: \_\_\_\_\_

Quantity: \_\_\_\_\_

Date: \_\_\_\_\_

Models	HOT WELLS	COLD WELLS	LENGTH
<input type="checkbox"/> CPT-51-RA-L/S	1	1	50 <sup>3/8"</sup>
<input type="checkbox"/> CPT-61-RA-L/S	1	3	60 <sup>3/8"</sup>
<input type="checkbox"/> CPT-62-RA-L/S	2	2	60 <sup>3/8"</sup>
<input type="checkbox"/> CPT-71-RA-L/S	1	4	74 <sup>3/8"</sup>
<input type="checkbox"/> CPT-72-RA-L/S	2	3	74 <sup>3/8"</sup>
<input type="checkbox"/> CPT-73-RA-L/S	3	2	74 <sup>3/8"</sup>
<input type="checkbox"/> CPT-91-RA-L/S	1	5	96 <sup>3/8"</sup>
<input type="checkbox"/> CPT-92-RA-L/S	2	4	96 <sup>3/8"</sup>
<input type="checkbox"/> CPT-93-RA-L/S	3	3	96 <sup>3/8"</sup>
<input type="checkbox"/> CPT-94-RA-L/S	4	2	96 <sup>3/8"</sup>

CPT-93-RA-L shown with options: (E) 8" wide Richlite® composite cutting board, (M) hinged single service buffet shield, and a removable stainless steel toe kick.



- TempestAir® cold pans exceed NSF7 with pans flush with top.
- Versatile static air system

- Pan rails remove easily
- Accommodates 6" deep pans
- Approved for deli and salad bar use

### Standard Features

- ✓ 30" wide 14 gauge stainless steel top
- ✓ Open Storage Base
- ✓ 5" Locking Swivel Casters
- ✓ Built-in TempestAir Cold Pan

### Top

- Height other than std. 36" (specify \_\_\_\_\_)
- (RE) Recess for 18" x 26" pans
- (TEW) Top Extensions (width \_\_\_\_\_)
- (TEL) Top Extensions (length \_\_\_\_\_)
- (CT) Corian® Top (specify \_\_\_\_\_)
- (QT) Stone Top (specify \_\_\_\_\_)
- (AA) Cam Operated Line-up Locks
- (FF) End Drop Shelf
- (BARS) Adapter Bars for Cold Pans

### Above the Top

- (F) Overshelf
- (GA) Sloped Front Protector, Adjustable
- (GAG) Sloped Front Protector - Adjustable - Glass Top Shelf
- (GC) Sloped Front Protector, Glass Clips
- (GCG) Sloped Front Protector - Glass Clips - Glass Top Shelf
- (M) Buffet Shield Single Service Hinged
- (N) Buffet Shield Double Service Hinged
- (GTS) Glass Top Shelf for Protector or Buffet Shield

- (I) 2 tier Display Shelf, single service
- (I2) 2 tier Display Shelf, double service
- (CCP) Curved Tempered Glass Protector
- (SCP) Straight Tempered Glass Protector
- (CCB) Curved Tempered Glass Buffet Shield
- Powder Ctd. finish (specify RAL # \_\_\_\_\_)
- (RR) LED Lights
- (S) Infra-Red Heat Lamp Strip
- (T) Bullet Type Heat Lamps
- (U) Infra-Red Heat Strip with Lights

### Tray Slide/Cutting Board

- (A) Beaded, stainless steel tray slide
- (B) Flat Surface, stainless steel tray slide
- (C) Tubular stainless steel tray slide
- (CTS) Corian® Tray Slide (specify \_\_\_\_\_)
- (QTS) Stone Tray Slide (specify \_\_\_\_\_)
- Powder Coated brackets (specify RAL # \_\_\_\_\_)
- (D) 8" wide Stainless Steel cutting board
- (E) 8" wide Richlite® composite cutting board
- Other cutting board width (specify \_\_\_\_\_)

### Base Options

- (EB) Enclosed Base - no under storage
- (Y) Hinged Doors
- (BB) Heated Storage Base
- (CC) Refrigerated Storage Base (36 high units only)
- (MM) Vertical Trim Strips

- (SS) Stainless Steel Legs
- (OP) Offset Panels
- Powder Coat Louvers (specify RAL # \_\_\_\_\_)
- S/S Toe Kick
- (IU) Intermediate Undershelf
- Other \_\_\_\_\_

### Plumbing & Electrical Options

- (DD) Convenience outlet, flush
- (EE) Convenience outlet, pedestal
- (DC) Daisy chain
- (LC) Load center
- (TL) Twist Lock Plug & Matching Receptacle
- (Z) Common Hot Food Well Drains
- (DV) Individual Hot Food Well Drains
- ¼" Turn Ball Valve
- Alternate Drain Location \_\_\_\_\_
- Water fill Faucet
- Auto Water fill Valve

### Other Options

- Vinyl Graphic Wrap
- Body Decal
- Canopy (specify style & color)
- Over-structure with signage & lights (specify \_\_\_\_\_)
- Digital Menu Boards
- Décor Panel

Hot-Cold Combo Table  
Stainless Steel (S) or Laminate Panel (L)

A.I.A. File No. 00-0-00

SIS No. 00-0-00

REV 2/01/19 - Printed in the U.S.A.



LTI, Inc.  
1947 Bill Casey Parkway (888) 584-2722  
Jonesboro, GA 30236 lowtempind.com


Approvals: \_\_\_\_\_

# Hot-Cold Combo Table

Stainless Steel (S) or Laminate Panel (L)



Hot-Cold Combo Table  
Stainless Steel (S) or Laminate Panel (L)

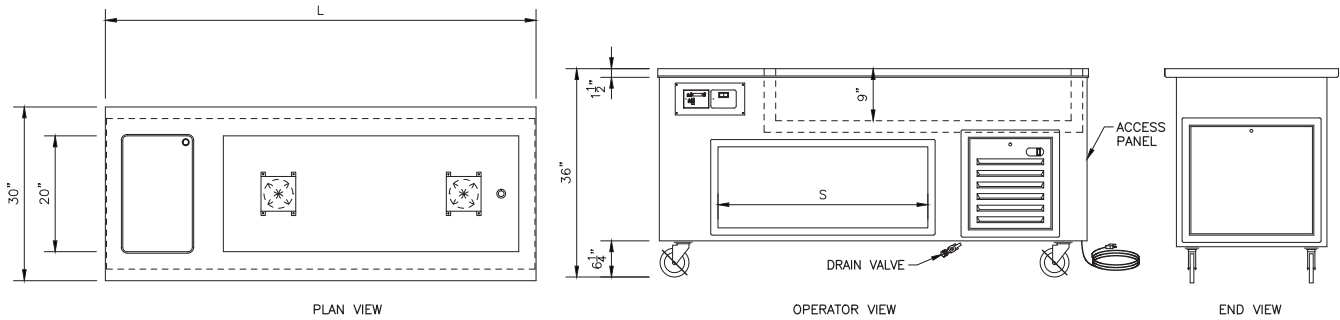

Model #	Hot Wells	Cold Wells	Unit Length (L)	Storage Length (S)	Comp.	120/208V, 1 Phase		120V, 1 Phase		Approximate Ship Weight
						Amps	Nema	Amps	Nema	
CPT-51-RA	1	1	50 <sup>3/8"</sup>	15"	1/3 HP	10	14-20	13.1	5-20P	450 lbs.
CPT-61-RA	1	3	60 <sup>3/8"</sup>	28"	1/3 HP	10	14-20	13.1	5-20P	580 lbs.
CPT-62-RA	2	2	60 <sup>3/8"</sup>	28"	1/3 HP	12.4	14-20	18.6	5-30P	580 lbs.
CPT-71-RA	1	4	74 <sup>3/8"</sup>	36"	1/3 HP	10.9	14-20	14	5-20P	676 lbs.
CPT-72-RA	2	3	74 <sup>3/8"</sup>	36"	1/3 HP	12.4	14-20	18.6	5-30P	676 lbs.
CPT-73-RA	3	2	74 <sup>3/8"</sup>	36"	1/3 HP	14.8	14-20	24.1	5-50P	676 lbs.
CPT-91-RA	1	5	96 <sup>3/8"</sup>	(2) 28"	1/3 HP	10.9	14-20	14	5-20P	750 lbs.
CPT-92-RA	2	4	96 <sup>3/8"</sup>	(2) 28"	1/3 HP	13.3	14-20	19.5	5-30P	750 lbs.
CPT-93-RA	3	3	96 <sup>3/8"</sup>	(2) 28"	1/3 HP	14.8	14-20	24.1	5-50P	750 lbs.
CPT-94-RA	4	2	96 <sup>3/8"</sup>	(2) 28"	1/3 HP	17.2	14-30	29.6	5-50P	750 lbs.

Adding additional electrical components will change the total electric load.

## Top

Top to be 30" wide and fabricated from a minimum of 14 ga. stainless steel with square turndown on all sides and corners fully welded, ground and polished. Top to have #4 satin finish and with all edges having a #7 hi-lite finish.

## Hot Food Units

Provide with dry/moist electric hot food wells to be bottom mounted and have a 12x 20 die stamped opening with ¼ raised beaded edge. Interior pan to be 304 stainless steel, deep drawn with coved corners and fully insulated with fiberglass insulation. Each hot food well to use a 500 watt at 208V heat source, or 661 watt at 120-240V heat source, with solid state digital controls for maximum energy efficiency. All switches and controls to be fully accessible. All wells are wired to a circuit breaker for current overload protection.

## Casters

5" diameter, ball bearing, swivel type casters to be non-marking and with brakes on all wheels. Casters to be mounted with exterior and interior bracing for maximum stress relief.

## TempestAir® Cold Pans

Cold pans to be 18 gauge stainless steel fully welded construction with ¼ coved corners. The cold pan shall be pitched to a drain extended to a valve below the base. Cold pans shall be furnished with urethane insulation on bottom and all four sides. The pan shall be fully separated from the counter top by a perimeter breaker strip. Cold pans are to allow for a full steam table pan 6" deep. Temp-est Aire cold pan shall be 9" deep and include a patented forced air refrigeration system. Cold pan includes low velocity fans and an advanced cold wall design operating on R507 refrigerant. Meet or exceed NSF7 standards while allowing food pans to remain flush to the counter top.

## Body (S)

Uni-body structure, fabricated from 18 gauge stainless steel, welded ground and polished. Interior reinforced with 12 gauge galvanized uprights to support shelving and a 20 gauge steel bottom.

## Body (L)

Standard grade laminate to cover all sides of an 18 gauge steel uni-body structure. Interior reinforced with 12 gauge galvanized uprights to support shelving and a 20 gauge steel bottom. Corners and bottom edge provided with ½ stainless steel trim strips.

We reserve the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacement for previously purchased equipment.

All equipment to be built in accordance with the Underwriters Laboratories, Inc. and the National Sanitation Foundation, Inc. standards and shall bear the Underwriters Laboratories, Inc. listing label for safety and the Underwriters Laboratories classification label for sanitation.

A.I.A. File No. 00-0-00

SIS No. 00-0-00

REV 2/01/19 - Printed in the U.S.A.

LTI, Inc.  
1947 Bill Casey Parkway  
Jonesboro, GA 30236

(888) 584-2722  
lowtempind.com



**Changing**  
how food is served.