



Project: \_\_\_\_\_

Item: \_\_\_\_\_

Quantity: \_\_\_\_\_

Date: \_\_\_\_\_

Models	Length
<input type="checkbox"/> CPM 1306-L/S	39 3/4"
<input type="checkbox"/> CPM 1310-L/S	57"
<input type="checkbox"/> CPM 1314-L/S	75 3/4"

Sliding Top Milk Case Dispenser  
Stainless Steel (S) or Laminate Panel (L)

CPM-1310-L shown with option: (GG) lid locks.



- Holds crates, no re-loading necessary
- Durable and easy to clean
- Easy mobility
- Crates maintained at easy-to-reach height

### Standard Features

- ✓ 14 gauge stainless steel tops
- ✓ Insulated stainless steel sliding doors
- ✓ Self-leveling crate dispensers
- ✓ Dispensers adjustable without tools
- ✓ Welded stainless steel interior
- ✓ 5" swivel casters

### Optional Features (specify)

- Height other than standard 36" (specify \_\_\_\_\_)
- (A) Beaded, stainless steel tray slide
- (B) Flat Surface, stainless steel tray slide
- (C) Tubular Solid Surface, stainless steel tray slide
- (CTS) Corian® Tray Slide (specify \_\_\_\_)
- (QTS) Stone Tray Slide (specify \_\_\_\_)
- Powder Coated brackets (specify RAL # \_\_\_\_\_)
- (D) 8" wide Stainless Steel cutting board
- (E) 8" wide Richlite® composite cutting board
- Other cutting board width (specify \_\_\_\_\_)

- (AA) Cam Operated Line-up Locks
- (DD) Convenience outlet, flush
- (EE) Convenience outlet, pedestal
- (FF) End Drop Shelf
- (GG) Lid Locks
- (MM) Vertical Trim Strips
- (SS) Stainless Steel Legs
- (TT) Wrap-around bumper
- (DC) Daisy chain
- (LC) Load center
- Powder Coat Louvers (specify RAL # \_\_\_\_\_)
- S/S Toe Kick

### Optional Features (specify)

- Vinyl Graphic Wrap
- Body Decal
- Canopy (specify style & color)
- Over-structure with signage & lights (specify \_\_\_\_\_)
- Digital Menu Boards
- Décor Panel

A.I.A. File No. 00-0-00

SIS No. 00-0-00

REV 2/01/19 - Printed in the U.S.A.


Approvals: \_\_\_\_\_

# Sliding Top Milk Case Dispenser

Stainless Steel (S) or Laminate Panel (L)



Sliding Top Milk Case Dispenser  
Stainless Steel (S) or Laminate Panel (L)

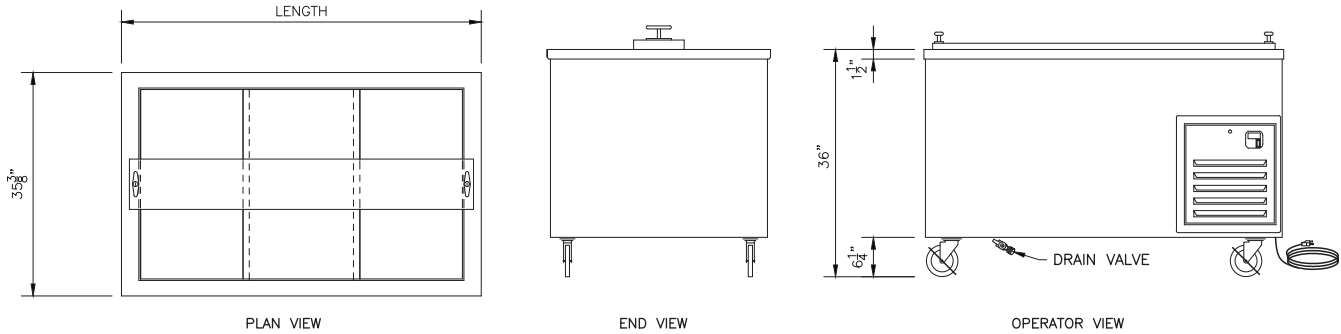

Model	Length	Dairy Cases	Capacity - using 1/2 pt cartons @ 48/case	Comp.	120V/1 phase		Ship Weight
					Amps	Plug	
CPM 1306	39 3/4"	6	288	1/3 H.P.	7.1	5-15P	375 lbs.
CPM 1310	57"	10	480	1/3 H.P.	7.1	5-15P	515 lbs.
CPM 1314	75 3/4"	14	672	1/3 H.P.	7.1	5-15P	595 lbs.

### Top and Lids

Top to be 14 ga. stainless steel with square turndown on all sides and corners fully welded, ground and polished. To have #4 satin finish and all edges to have #7 hi-lite finish. Interior top to turn down into opening and complete with integral ledges to support sliding lids. Lids shall be 18 ga. stainless steel double pan construction complete with stainless steel hand pulls. Cabinet and lids are full insulated with urethane insulation.

### Self-leveling System

Each milk crate to be held at proper height by two stainless steel self-leveling mechanisms, field adjustable without tools, and a removable stainless steel carrier. (Area above compressor will not be self-leveling.)

### Refrigeration System

A temperature of 38 degrees F shall be maintained by a cold wall evaporator system, with an accessible expansion valve. The condensing unit shall be a fully hermetic system using R-134A refrigerant, with all necessary controls.

### Body (S)

Uni-body structure, fabricated from 18 gauge stainless steel, welded ground and polished. Interior reinforced with 12 gauge galvanized uprights to support shelving and a 20 gauge steel bottom.

### Body (L)

Standard grade laminate to cover all sides of an 18 gauge steel uni-body structure. Interior reinforced with 12 gauge galvanized uprights to support shelving and a 20 gauge steel bottom. Corners and bottom edge provided with 1/2" stainless steel trim strips. Refrigerated interior to be a welded steel cabinet with a water tight liner, fully insulated and with a 1" brass drain extended below the body to a shut off valve.

### Casters

5" diameter, ball bearing, swivel type casters to be non-marking and with brakes on all wheels. Casters to be mounted with exterior and interior bracing for maximum stress relief.

We reserve the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacement for previously purchased equipment.

All equipment to be built in accordance with the Underwriters Laboratories, Inc. and the National Sanitation Foundation, Inc. standards and shall bear the Underwriters Laboratories, Inc. listing label for safety and the Underwriters Laboratories classification label for sanitation.

A.I.A. File No. 00-0-00

SIS No. 00-0-00

REV 2/01/19 - Printed in the U.S.A.

LTI, Inc.  
1947 Bill Casey Parkway  
Jonesboro, GA 30236

(888) 584-2722  
lowtempind.com



**Changing**  
how food is served.