



Project: \_\_\_\_\_

Item: \_\_\_\_\_

Quantity: \_\_\_\_\_

Date: \_\_\_\_\_

Models	Pans
<input type="checkbox"/> DI-2025TA-SP3	2
<input type="checkbox"/> DI-2037TA-SP3	3
<input type="checkbox"/> DI-2050TA-SP3	4
<input type="checkbox"/> DI-2063TA-SP3	5
<input type="checkbox"/> DI-2075TA-SP3	6

Sloped Cold Food Well Drop-In

## DI-2050TA-SP3



- Holds products in open pans at 40° F or less
- Maintains critical temperatures without freezing
- Self contained design allows for easy installation in any counter, cart or table.

## Performance

LTI's Temp-est Aire Cold Food Well Drop-In was developed to hold product in open pans at a temp. of 40 degrees F or less, while in an ambient temperature of up to 86 degrees F.

The patented design features a refrigeration system that utilizes convection air to produce a circulating "cold air zone" around the full area of the insert pan. The system maintains critical temperatures without risk of freezing.

Product must be pre-chilled to a temperature below 40 degrees F, and kept at a level 1/2" below the top of the storage pan to ensure proper cooling.

Our "drop-In" configuration provides a self-contained unit that allows for easy installation in any counter, serving line, cart or table.

Meets NSF7 requirements with pans flush with countertop.

### Standard Features

- ✓ Full sealing gasket
- ✓ 20" adapter bars
- ✓ 6' cord and plug
- ✓ 120V, 60, 1PH
- ✓ 1/2" turn down edge

### Optional Features (specify)

- Custom sign/logo (specify \_\_\_\_\_)
- Small pan divider bars
- Hugged edge (H)
- Skirt mounted on/off switch pre-wired to electrical receptacle
- Other voltage, phase, cycle (specify \_\_\_\_\_)

A.I.A. File No. 00-0-00


SIS No. 00-0-00

REV 2/01/19 - Printed in the U.S.A.



LTI, Inc.  
1947 Bill Casey Parkway (888) 584-2722  
Jonesboro, GA 30236 lowtempind.com

Approvals: \_\_\_\_\_

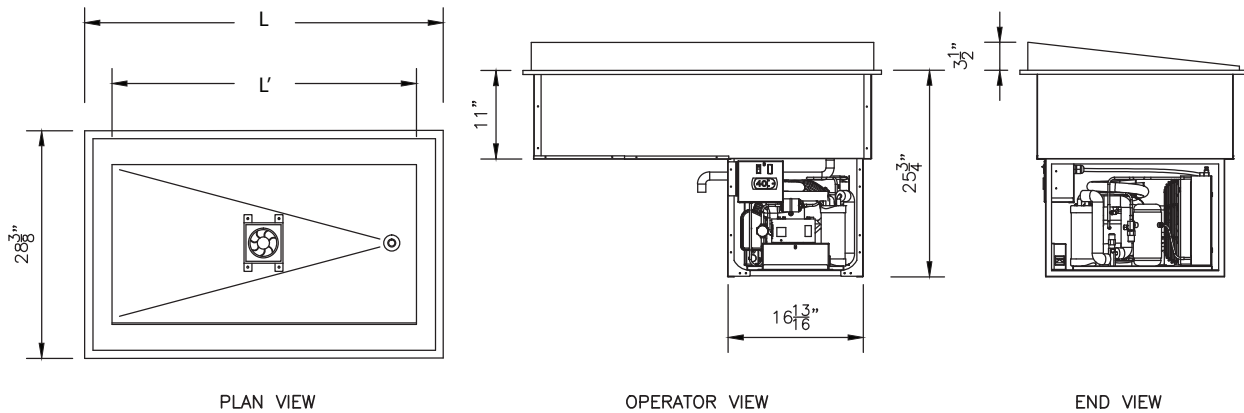

TA Cold Food Well Drop-Ins have an interior well depth of 9 inches to accommodate a maximum of 6 inch deep food pan. A three inch gap between food pan and cooling fans must be maintained for proper operation.

Model	Pans	L	L'	Cut-out size	H.P.	Volts	Fans	Amps (120V)	NEMA Plug
DI-2025TA-SP3	2	32 1/4"	24 3/4"	25 3/8" x 29 7/8"	1/3	120V/1	1	7.6	5-15
DI-2037TA-SP3	3	45"	37 7/8"	25 3/8" x 42 7/8"	1/3	120V/1	1	7.6	5-15
DI-2050TA-SP3	4	57 3/4"	51"	25 3/8" x 55 7/8"	1/3	120V/1	2	8.5	5-15
DI-2063TA-SP3	5	70 1/2"	64"	25 3/8" x 68 7/8"	1/3	120V/1	2	8.5	5-15
*DI-2075TA-SP3	6	83 1/4"	77"	25 3/8" x 81 7/8"	1/2	120V/1	3	12	5-15

\* Wider compressor housing required

### Specifications

Top perimeter frame to be constructed of 14 gauge stainless steel, welded, ground and polished with a thermal break provided between the top and refrigerated interior. Interior pan to be 18 gauge stainless steel, fully welded, ground and polished with a 3/4" open drain. To be fully insulated with a 1-1/2" to 2" urethane insulation. The exterior jacket to be constructed of heavy gauge galvanized steel.

Refrigeration system to be hermetically sealed compressor operating on R-507 (HFC) refrigerant and will include the Temp-est Aire circulating cold air system. Thermostatic control will clear the cooling surface of frost on every cycle.

All switches and controls to be fully accessible. Provide with cord and plug.

Units to be UL listed and shall bear the UL classified EPH label for sanitation meeting all NSF7 requirements.

NOTE: To ensure proper operation, adequate airflow must be provided.

### Approval/Submittal (signature required)

Model # \_\_\_\_\_

Adherence to LTI installation instructions is required.

Failure to do so may void the warranty.

Signature \_\_\_\_\_

Date \_\_\_\_\_

We reserve the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacement for previously purchased equipment.

All equipment to be built in accordance with the Underwriters Laboratories, Inc. and the National Sanitation Foundation, Inc. standards and shall bear the Underwriters Laboratories, Inc. listing label for safety and the Underwriters Laboratories classification label for sanitation.