

Beverage Serving Counter

Laminate Panel (LP) or Stainless Steel (SS)



SPC-BT-LP-60







U.L. Sanitation Classified to NSF Standards

- Versatile counters, add the options you need!
- Attractive, colorful, laminate panels
- Easy to clean, low maintenance

Project: ______

Quantity: ___

Date: _

Models	Length	
☐ SPC-BT-LP/SS-28	28 3/8"	
☐ SPC-BT-LP/SS-36	36 ^{3/8} "	
☐ SPC-BT-LP/SS-50	50 ^{3/8*}	
☐ SPC-BT-LP/SS-60	60 ^{3/8} "	
☐ SPC-BT-LP/SS-66	66 3/8"	
☐ SPC-BT-LP/SS-74	74 ^{3/8} "	
☐ SPC-BT-LP/SS-84	84 3/8"	
☐ SPC-BT-LP/SS-96	96 ^{3/8} "	

Standard Features

- √ 30" wide 14 gauge stainless steel top
- √ Stainless steel or laminate panel body
- ✓ Drain trough
- ✓ Open Storage Base
- √ 5" Locking Swivel Casters

Specifications

Top - Top to be 30" wide and fabricated from a minimum of 14 gauge stainless steel with square turndown on all sides and corners fully welded, ground and polished. Top to have #4 satin finish.

Body (SS) - Uni-body structure, fabricated from 18 gauge stainless steel, welded ground and polished. Interior reinforced with 12 gauge galvanized uprights to support shelving and a 11 gauge steel bottom.

Body (LP) - Standard grade laminate to cover all sides of an 18 gauge steel uni-body structure. Interior reinforced with 12 gauge galvanized uprights to support shelving and a 11 gauge steel bottom. Corners and bottom edge provided with ½" stainless steel trim strips.

Drain Trough - 14 ga. stainless steel drain trough welded into top and fitted with a removable stainless steel anti splash grid. Trough to slope to 1" open brass drain and extend to 1/4 turn hose bibb shut off valve located below base.

Options

Top Options

- ☐ Height Other Than Standard 36" (Specify _____)
- ☐ (MR) #7 Hi-Lite Edge
- ☐ (TWE) Top Width Extension (Specify _
- ☐ (AA) Cam Operated Line-up Locks

Tray Slide/Cutting Board Options

- ☐ (A) 10" Beaded, Stainless Steel
- ☐ (B) 10" Flat Surface, Stainless Steel
- ☐ (C) 10" Tubular Tray Slide
- ☐ (CTS) 10" Corian Tray Slide Solid
- ☐ (CTR) 10" Corian Tray Slide Routed Runners
- ☐ (D) 6" Wide Stainless Steel Cutting Board
- ullet (E) 6" Wide Richlite® Composite Cutting Board
- ☐ (E1) 6" Santalite cutting board
- ☐ (FF) End Drop Shelf 12" x 30"

Base Options


- ☐ (EB) Enclosed Base No Under Storage
- ☐ (Y) Hinged Doors
- ☐ (MM) Vertical Trim Strips
- ☐ (SS) Stainless Steel Legs
- ☐ S/S Toe Kick (TC)
- ☐ (IU) Intermediate Under-shelf
- □ Other _____

Plumbing & Electrical Options

- ☐ (DD) Convenience Outlet, Flush
- ☐ (DC) Daisy Chain Outlet
- ☐ ¼ Turn Threaded Ball Valve
- ☐ Alternate Drain Location (Consult Factory)

REV 3/25/24

Approvals:

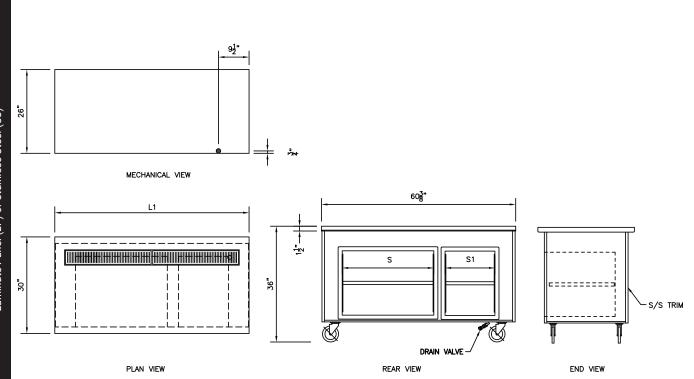

Model	L	s	\$1	Approx. Ship Weight
SPC-BT-LP/SS-28	28 3/8"	15"	N/A	205 lbs.
SPC-BT-LP/SS-36	36 3/8"	15"	N/A	220 lbs.
SPC-BT-LP/SS-50	50 3/8"	15"	N/A	260 lbs.
SPC-BT-LP/SS-60	60 3/8"	28"	15"	300 lbs.
SPC-BT-LP/SS-66	66 3/8"	28"	15"	320 lbs.
SPC-BT-LP/SS-74	74 3/8"	28"	28"	340 lbs.
SPC-BT-LP/SS-84	84 3/8"	28"	28"	360 lbs.
SPC-BT-LP/SS-96	96 3/8"	28"	28"	380 lbs.

Other Options (Contact Factory)

- ☐ Vinyl Graphic Wrap (Not Available For Laminate Panel Body Type)
- Body Decal
- ☐ Over-Structure With Signage & Lights (Specify_____)
- ☐ Stand Off Panel
 (Specify Materials_____

We reserve the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacement for previously purchased equipment.

All equipment to be built in accordance with the Underwriters Laboratories. Inc. and the National Sanitation Foundation, Inc. standards and shall bear the Underwriters Laboratories, Inc. listing label for safety and the Underwriters Laboratories classification label for sanitation.

REV 3/25/24