



**50-CPS-F, shown with options:** (A) beaded stainless tray slide, (E) 8" wide Richlite® composite cutting board, and (GA) sloped front adjustable protector.



U.L. Sanitation Classified to NSF Standards

- With optional heat lamps and pan recess, this is ideal for serving piping hot pizza slices!
- Durable, colorful molded fiberglass mobile units
- Easy to clean, low maintenance

## Specifications

**Top** - Top to be 30" wide and fabricated from a minimum of 14 ga. stainless steel with square turndown on all sides and corners fully welded, ground and polished. Top to have #4 satin finish and with all edges having a #7 hi-lite finish.

**Body (F)** - Body to be seamless molded fiberglass (F.R.P.) with smooth exterior surfaces and rounded corners. To be constructed by a hand lay-up process with four layers of 1.5 oz continuous strand fiberglass mat, plus a 24 oz layer of woven roving on the bottom for added strength. Fiberglass to be flame retardant per specification ASTM E-162 having a flame spread of 25% or less. Body interior to be reinforced at each end with 4" wide, 12 gauge galvanized channels welded to form integral U frame for maximum stress relief.

**Heated Top** - Heated top surface to be maintained at 120 deg. F by an insulated heat blanket attached securely to the underside of the 14 gauge stainless steel top. Surface temperature to be controlled by an infinite control recessed into the fiberglass body below the top on the operator's side.

## Options

### Top

- Height other than std. 36" (specify \_\_\_\_)
- (RE) Recess for 18" x 26" pans
- (FF) End Drop Shelf

### Above the Top

- (F) Overshelf
- (GA) Sloped Front Protector, Adjustable
- (GAG) Sloped Front Protector
  - Adjustable - Glass Top Shelf
- (GC) Sloped Front Protector, Glass Clips
- (GCG) Sloped Front Protector
  - Glass Clips - Glass Top Shelf
- (M) Buffet Shield Single Service Hinged

- (N) Buffet Shield Double Service Hinged
- (I) 2 tier Display Shelf, single service
- (I2) 2 tier Display Shelf, double service
- (RR) LED Lights
- (S) Infra-Red Heat Lamp Strip
- (U) Infra-Red Heat Strip with Lights

### Tray Slide/Cutting Board Options

- (A) Beaded, stainless steel tray slide
- (B) Flat Surface, stainless steel tray slide
- (C) Tubular stainless steel tray slide
- (D) 8" wide Stainless Steel cutting board
- (E) 8" wide Richlite® composite cutting board

### Base Options

- (EB) Enclosed Base - no under storage
- (Y) Hinged Doors
- (BB) Heated Storage Base
- (NN) Fiberglass Door Panels
- (MM) Vertical Trim Strips
- (SS) Stainless Steel Legs
- S/S Toe Kick

### Plumbing & Electrical Options

- (DD) Convenience outlet, flush
- Alternate Drain Location \_\_\_\_\_

Project: \_\_\_\_\_

Item: \_\_\_\_\_

Quantity: \_\_\_\_\_

Date: \_\_\_\_\_

### Models Length

<input type="checkbox"/> 28-CPS-F	28 3/8"
<input type="checkbox"/> 36-CPS-F	36 3/8"
<input type="checkbox"/> 50-CPS-F	50 3/8"
<input type="checkbox"/> 60-CPS-F	60 3/8"
<input type="checkbox"/> 66-CPS-F	66 3/8"
<input type="checkbox"/> 74-CPS-F	74 3/8"
<input type="checkbox"/> 84-CPS-F	84 3/8"
<input type="checkbox"/> 96-CPS-F	96 3/8"
<input type="checkbox"/> 144-CPS-F	144 3/8"

### Standard Features

- ✓ 30" wide 14 gauge stainless steel top
- ✓ Molded fiberglass body
- ✓ Open Storage Base
- ✓ 5" Locking Swivel Casters
- ✓ Cam Operated Line-up Locks

# Hot Top Table


Molded Fiberglass (F)




Hot Top Table  
Molded Fiberglass (F)

A.I.A. File No. 00-0-00


SIS No. 00-0-00

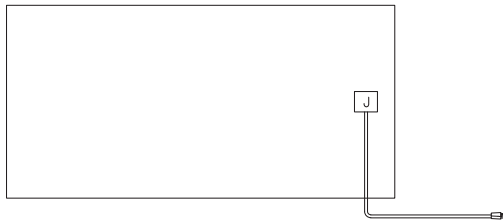


MECHANICAL VIEW

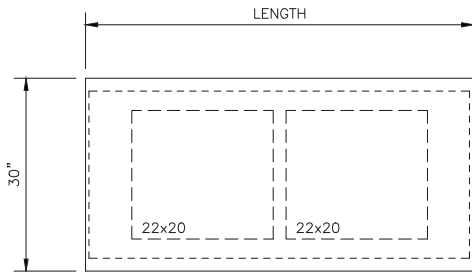

PLAN VIEW



END VIEW

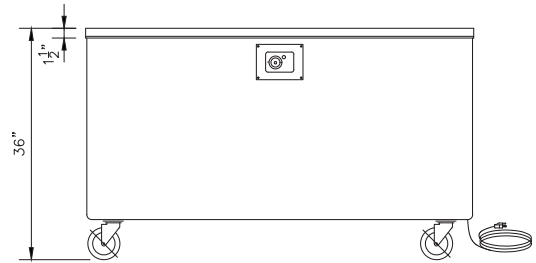

OPERATOR VIEW

Model #	Unit Length (L)	Heated Length (L')	Storage Length (S)	120V, 1 Phase		Approximate Ship Weight
				Amps	Nema	
28-CPS	28 <sup>3/8"</sup>	22"	N/A	1	5-15P	150 lbs.
36-CPS	36 <sup>3/8"</sup>	30"	15"	1.3	5-15P	200 lbs.
50-CPS	50 <sup>3/8"</sup>	44"	36"	2.4	5-15P	225 lbs.
60-CPS	60 <sup>3/8"</sup>	54"	46"	2.8	5-15P	250 lbs.
66-CPS	66 <sup>3/8"</sup>	54"	46"	2.8	5-15P	275 lbs.
74-CPS	74 <sup>3/8"</sup>	68"	(2) 28"	3.7	5-15P	275 lbs.
84-CPS	84 <sup>3/8"</sup>	68"	28" & 36"	3.7	5-15P	300 lbs.
96-CPS	96 <sup>3/8"</sup>	90"	28" & 46"	4.1	5-15P	325 lbs.
144-CPS	144 <sup>3/8"</sup>	90"	(2) 46"	4.1	5-15P	400 lbs.

Adding additional electrical components will change the total electric load.

## Décor Options (Contact Factory)

- Vinyl Graphic Wrap
- Body Decal
- Over-structure with signage & lights  
(specify \_\_\_\_\_)
- Stand Off Panel  
(specify materials \_\_\_\_\_)

We reserve the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacement for previously purchased equipment.

All equipment to be built in accordance with the Underwriters Laboratories, Inc. and the National Sanitation Foundation, Inc. standards and shall bear the Underwriters Laboratories, Inc. listing label for safety and the Underwriters Laboratories classification label for sanitation.

REV 11/4/19 - Printed in the U.S.A.

LTI, Inc.  
1947 Bill Casey Parkway  
Jonesboro, GA 30236

(888) 584-2722  
lowtempind.com



Changing  
how food is served.™