



Project: _____

Item: _____

Quantity: _____

Date: _____

Models	Length
<input type="checkbox"/> SPC-FT-LP/SS-18-26-36	36 ^{3/8"}
<input type="checkbox"/> SPC-FT-LP/SS-25-36-50	50 ^{3/8"}
<input type="checkbox"/> SPC-FT-LP/SS-25-54-60	60 ^{3/8"}
<input type="checkbox"/> SPC-FT-LP/SS-25-54-66	66 ^{3/8"}
<input type="checkbox"/> SPC-FT-LP/SS-25-54-74	74 ^{3/8"}
<input type="checkbox"/> SPC-FT-LP/SS-25-72-84	84 ^{3/8"}
<input type="checkbox"/> SPC-FT-LP/SS-25-90-96	96 ^{3/8"}

Standard Features

- ✓ 30" wide 14 gauge stainless steel top
- ✓ Open Storage Base
- ✓ 5" Locking Swivel Casters

SPC-FT-LP-25-54-60



■ All Frost Top units are sanitation classified under ANSI/NSF-2. For the new NSF-7 requirements, see our CFMA and CFMX series.

■ Removable, washable grate keeps product from freezing to the surface.

Specifications

Top - Top to be 30" wide and fabricated from a minimum of 14 gauge stainless steel with square turndown on all sides and corners fully welded, ground and polished. Top to have #4 satin finish.

Frost Top - To be stainless steel watertight pan mounted under a turndown in the 14 gauge stainless steel top providing a 5/8" recess. Recess shall accommodate a removable, washable bar mat to keep a continuous refrigeration coil bonded to the underside, fully insulated with urethane insulation.

To include a full perimeter breaker strip, and a 1" open brass drain extended to a ¼ turn hose bibb shut-off valve below the body. Temperature shall be maintained by a self-contained, fully hermetic type R-449A condensing unit.

Body (SS) - Uni-body structure, fabricated from 18 gauge stainless steel, welded ground and polished. Interior reinforced with 12 gauge galvanized uprights to support shelving and a 11 gauge steel bottom.

Body (LP) - Standard grade laminate to cover all sides of an 18 gauge steel uni-body structure. Interior reinforced with 12 gauge galvanized uprights to support shelving and a 11 gauge steel bottom. Corners and bottom edge provided with ½" stainless steel trim strips.

Options

Top Options

- Height Other Than Standard 36" (Specify _____)
- (AA) Cam Operated Line-up Locks
- (MR)#7 Hi-Lite Edge
- (TWE) Top Width Extension (Specify _____)

Above the Top

- (CCCP) CrystalClear Counter Protector
- (CCSB) CrystalClear Self-Service Single Buffet Shield
- (CCDB) CrystalClear Self-Service Double Buffet Shield
- (CCPADJ) CrystalClear Counter Protector Adjustable from Self-Service to Full-Service
- (CCSMT) Crystal Clear Multi-Tier Single Service
- (CCDMT) Crystal Clear Multi-Tier Double Service
- (F) Overshelf
- (GA) Sloped Front Protector, Adjustable
- (GAG) Sloped Front Protector - Adjustable - Glass Top Shelf

- (GC) Sloped Front Protector, Glass Clips
- (GCG) Sloped Front Protector - Glass Clips - Glass Top Shelf
- (GTS) Glass Top Shelf for Protector or Buffet Shield
- (M) Buffet Shield Single Service Hinged
- (N) Buffet Shield Double Service Hinged
- (I) 2 Tier Display Shelf, Single Service
- (I2) 2 Tier Display Shelf, Double Service
- (SCP) Straight Tempered Glass Protector
- (FTO) Frost Top Overshelf Display
- (RR) LED Lights

Tray Slide/Cutting Board Options

- (A) 10" Beaded, Stainless Steel Tray Slide
- (B) 10" Flat Surface, Stainless Steel
- (C) 10" Tubular Tray Slide
- (CTS) 10" Corian Tray Slide Solid

- (CTR) 10" Corian Tray Slide Routed Runners
- (D) 6" Wide Stainless Steel Cutting Board
- (E) 6" Wide Richlite® Composite Cutting Board
- (E1) 6" Santalite cutting board
- (FF) End Drop Shelf 12" x 30"

Base Options

- (EB) Enclosed Base - No Under Storage
- (Y) Hinged Doors
- (MM) Vertical Trim Strips
- (SS) Stainless Steel Legs
- S/S Toe Kick

Plumbing & Electrical Options

- (DD) Convenience Outlet, Flush
- (DC) Daisy Chain
- ¼ Turn Threaded Ball Valve
- Alternate Drain Location (Consult Factory)

REV 5/16/24



LTI, Inc.
1947 Bill Casey Parkway (888) 584-2722
Jonesboro, GA 30236 lowtempind.com

Approvals: _____

Refrigerated Frost Top Serving Counter
Laminate Panel (LP) or Stainless Steel (SS)

A.I.A. File No. 00-0-00

SIS No. 00-0-00


Refrigerated Frost Top Serving Counter

Laminate Panel (LP) or Stainless Steel (SS)

Refrigerated Frost Top Serving Counter
Laminate Panel (LP) or Stainless Steel (SS)

A.I.A. File No. 00-0-00

SIS No. 00-0-00

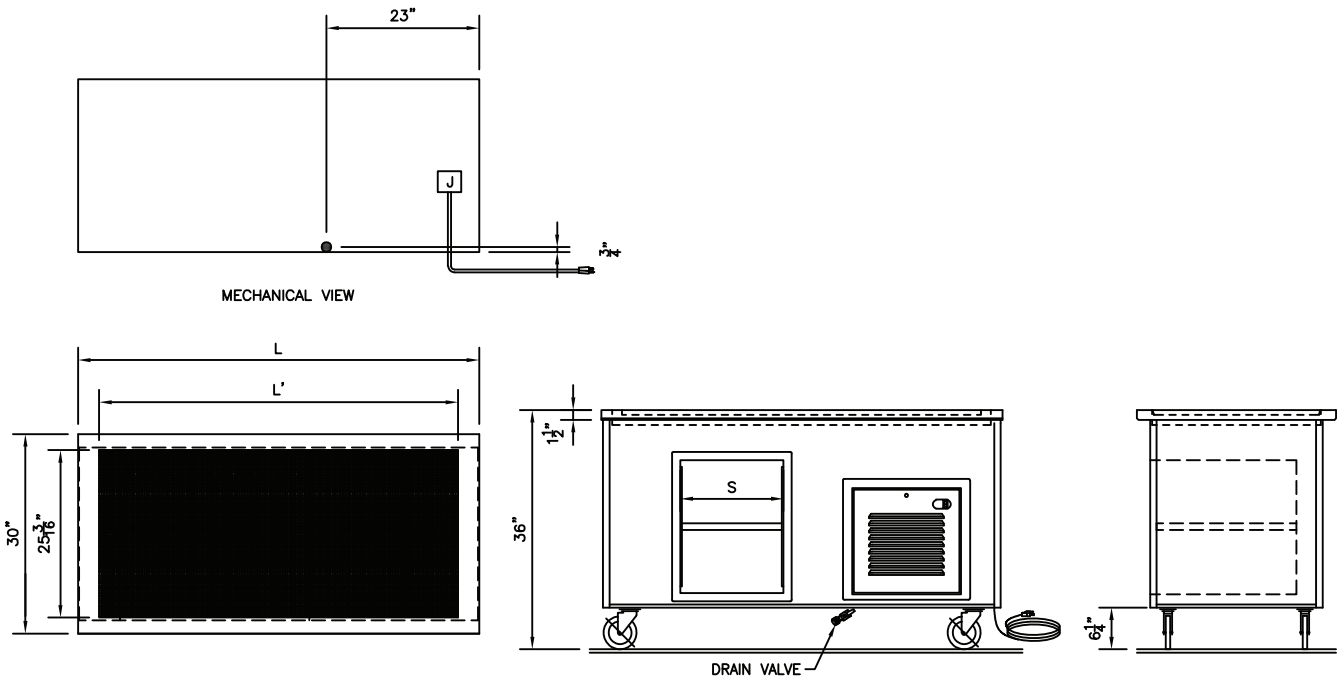

Model	Unit Length (L)	(L')	S	S1	Number of 18x26 Sheet Pans	Comp.	120V, 1 Phase		Approximate Ship Weight
							Amps	Nema	
SPC-FT-LP/SS-18-26-36	36 ^{3/8"}	26"	N/A	N/A	1	1/3	7	5-15P	400 lbs.
SPC-FT-LP/SS-25-36-50	50 ^{3/8"}	36"	15"	N/A	2	1/3	7	5-15P	450 lbs.
SPC-FT-LP/SS-25-54-60	60 ^{3/8"}	54"	15"	N/A	3	1/3	7	5-15P	580 lbs.
SPC-FT-LP/SS-25-54-66	66 ^{3/8"}	54"	28"	N/A	3	1/3	7	5-15P	600 lbs.
SPC-FT-LP/SS-25-54-74	74 ^{3/8"}	54"	28"	N/A	3	1/3	7	5-15P	676 lbs.
SPC-FT-LP/SS-25-72-84	84 ^{3/8"}	72"	28"	15"	4	1/3	7	5-15P	700 lbs.
SPC-FT-LP/SS-25-90-96	96 ^{3/8"}	90"	28"	15"	5	1/3	7	5-15P	750 lbs.

Adding additional electrical components will change the total electric load.

Décor Options (Contact Factory)

- Vinyl Graphic Wrap
- Body Decal
- Over-Structure With Signage & Lights
(Specify _____)
- Stand Off Panel
(Specify Materials _____)

We reserve the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacement for previously purchased equipment.

All equipment to be built in accordance with the Underwriters Laboratories, Inc. and the National Sanitation Foundation, Inc. standards and shall bear the Underwriters Laboratories, Inc. listing label for safety and the Underwriters Laboratories classification label for sanitation.

REV 5/16/24