



Project: \_\_\_\_\_

Item: \_\_\_\_\_

Quantity: \_\_\_\_\_

Date: \_\_\_\_\_

### Models Length

<input type="checkbox"/> 28-ST-F	28 3/8"
<input type="checkbox"/> 36-ST-F	36 3/8"
<input type="checkbox"/> 50-ST-F	50 3/8"
<input type="checkbox"/> 60-ST-F	60 3/8"
<input type="checkbox"/> 66-ST-F	66 3/8"
<input type="checkbox"/> 74-ST-F	74 3/8"
<input type="checkbox"/> 84-ST-F	84 3/8"
<input type="checkbox"/> 96-ST-F	96 3/8"
<input type="checkbox"/> 144-ST-F	144 3/8"

### Standard Features

- ✓ 30" wide 14 gauge stainless steel top
- ✓ Molded fiberglass body
- ✓ Open Storage Base
- ✓ 5" Locking Swivel Casters
- ✓ Cam Operated Line-up Locks

66-ST-F shown with options: (A) Beaded, stainless steel tray slide and (I) 2 tier display shelf, single service protector



- Most versatile counters, add the options you need!
- Durable, colorful, molded fiberglass
- Easy to clean, low maintenance
- 12' (144-ST) unit can be made into a complete reimbursable line.

## Specifications

**Top** - Top to be 30" wide and fabricated from a minimum of 14 ga. stainless steel with square turndown on all sides and corners fully welded, ground and polished. Top to have #4 satin finish and with all edges having a #7 hi-lite finish.

**Body (F)** - Body to be seamless molded fiberglass (F.R.P.) with smooth exterior surfaces and rounded corners. To be constructed by a hand lay-up process with four layers of 1.5 oz continuous strand fiberglass mat, plus a 24 oz layer of woven roving on the bottom for added strength.

Fiberglass to be flame retardant per specification ASTM E-162 having a flame spread of 25% or less. Body interior to be reinforced at each end with 4" wide, 12 gauge galvanized channels welded to form integral U frame for maximum stress relief.

## Options

### Top Options

- Height other than std. 36" (specify \_\_\_\_)
- (FF) End Drop Shelf

### Above the Top

- (F) Overshelf
- (GA) Sloped Front Protector, Adjustable
- (GAG) Sloped Front Protector - Adjustable - Glass Top Shelf
- (GC) Sloped Front Protector, Glass Clips
- (GCG) Sloped Front Protector - Glass Clips - Glass Top Shelf
- (M) Buffet Shield Single Service Hinged
- (N) Buffet Shield Double Service Hinged
- (GTS) Glass Top Shelf for Protector or Buffet Shield
- (I) 2 tier Display Shelf, single service
- (I2) 2 tier Display Shelf, double service
- Powder Coated finish (specify RAL #\_\_\_\_)
- (RR) LED Lights

### Tray Slide/Cutting Boards

- (A) Beaded, stainless steel tray slide
- (B) Flat Surface, stainless steel tray slide
- (C) Tubular stainless steel tray slide
- (QTS) Stone Tray Slide (specify \_\_\_\_)
- (D) 8" wide Stainless Steel cutting board
- (E) 8" wide Richlite® composite cutting board

### Base Options

- (EB) Enclosed Base - no under storage
- (Y) Hinged Doors
- (BB) Heated Storage Base
- (CC) Refrigerated Storage Base (36 high units only)
- (NN) Fiberglass Door Panels
- (MM) Vertical Trim Strips
- (SS) Stainless Steel Legs
- S/S Toe Kick

### Plumbing & Electrical Options

- (DD) Convenience outlet, flush

REV 10/25/19 - Printed in the U.S.A.



LTI, Inc.  
1947 Bill Casey Parkway (888) 584-2722  
Jonesboro, GA 30236 lowtempind.com

Approvals: \_\_\_\_\_

# Solid Top Table


Molded Fiberglass (F)



Solid Top Table  
Molded Fiberglass (F)

A.I.A. File No. 00-0-00

SIS No. 00-0-00

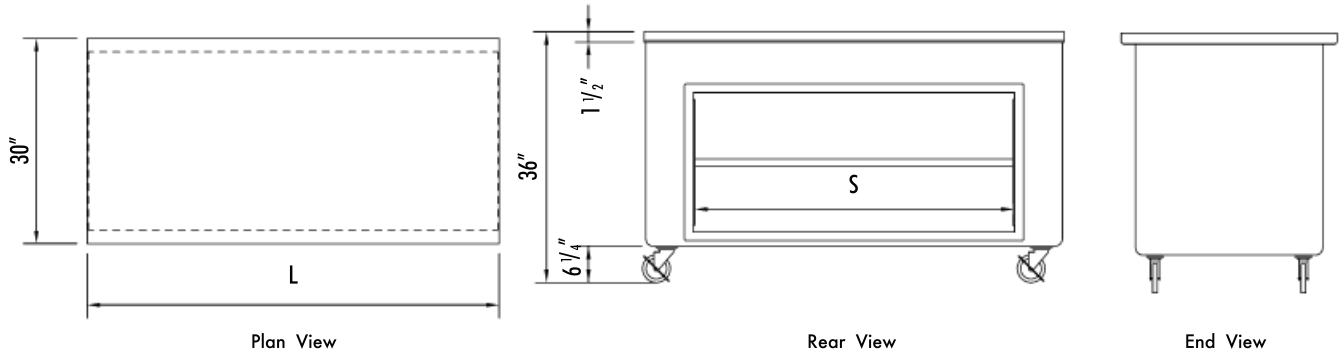

Model	L	S	Approx. Ship Weight
28-ST	28 3/8"	N/A	205 lbs.
36-ST	36 3/8"	15"	220 lbs.
50-ST	50 3/8"	36"	260 lbs.
60-ST	60 3/8"	46"	300 lbs.
66-ST	66 3/8"	46"	320 lbs.
74-ST	74 3/8"	(2) 28"	340 lbs.
84-ST	84 3/8"	28" & 36"	360 lbs.
96-ST	96 3/8"	28" & 46"	380 lbs.
144-ST	144 3/8"	(2) 46"	750 lbs.

## Décor Options (Contact Factory)

- Vinyl Graphic Wrap
- Body Decal
- Canopy (specify style & color)
- Over-structure with signage & lights (specify\_\_\_\_\_)
- Stand Off Panel (specify materials\_\_\_\_\_)

We reserve the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacement for previously purchased equipment.

All equipment to be built in accordance with the Underwriters Laboratories, Inc. and the National Sanitation Foundation, Inc. standards and shall bear the Underwriters Laboratories, Inc. listing label for safety and the Underwriters Laboratories classification label for sanitation.

REV 10/25/19 - Printed in the U.S.A.

LTI, Inc.  
1947 Bill Casey Parkway  
Jonesboro, GA 30236

(888) 584-2722  
lowtempind.com



Changing  
how food is served.™