



NEW MODELS!
 "Managing the water in hot wells ...no thanks"




LOWER ENERGY USAGE

Operators continuously seek out new ways to conserve water while reducing energy usage. LTI's energy efficient THERMALWELL technology meets these goals by utilizing a silicone heat blanket that can be used with or without water inside the well.

Six Well Table Yearly Cost

Controlled lab side by side testing of 2 competitors vs LTI
 8 hours/day – 6 days/week – 50 weeks/year

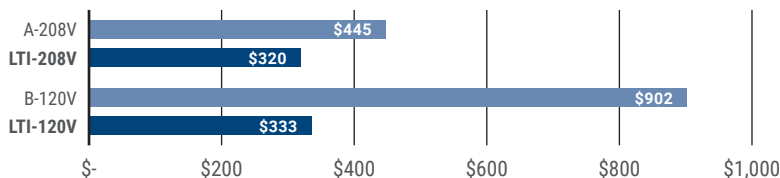

Average kWh in the US across all states is 10.89 cents per kWh for commercial.
 See chooseenergy.com/electricity-rates-by-state/

DRY WELLS FEATURES:

- No drains required
- No water required
- Uses under .25kwh an hour
- Bottom and side wall even heating

STANDARD FEATURES:

- 563-watt (208v) blanket heaters uses 40% to 150% less energy than major competitors
- Each well had independent temperature control settings
- Digital controller accurately holds desired temperatures
- Standard models Dry or Dry/Wet operation
- Two-year parts and labor warranty



LTI, INC.
 LOWTEMPIND.COM/THERMALWELL
 (888) 584-2722
 INFO@LOWTEMPIND.COM

STANDARD SIZES

DRY OR WET


Model #	Pans	L	L1	Cut-out size	208V, 1 phase		240V, 1 phase		120V, 1 phase	
					Watts	Amps	Watts	Amps	Watts	Amps
TW-DW-1	1	16 1/2"	7 1/4"	22 5/8" x 14 1/4"	563.5	2.7	751	3.15	751	6.25
TW-DW-2	2	30 1/2"	12"	22 5/8" x 28 1/4"	1127	5.4	1502	6.3	1502	12.5
TW-DW-3	3	44 1/2"	16 3/4"	22 5/8" x 42 1/4"	1690	8.1	2253	9.4	2253	18.8
TW-DW-4	4	58 1/2"	21 1/2"	22 5/8" x 56 1/4"	2253	10.8	3004	12.5	3004	25
TW-DW-5	5	72 1/2"	26 1/4"	22 5/8" x 70 1/4"	3816	13.5	3755	15.6	3755	31.3
TW-DW-6	6	86 1/2"	31"	22 5/8" x 84 1/4"	3380	16.3	4506	18.8	4506	37.6

NEW!

DRY ONLY

Model #	Pans	L	L1	Cut-out size	208V, 1 phase		240V, 1 phase		120V, 1 phase	
					Watts	Amps	Watts	Amps	Watts	Amps
TW-D-1	1	16 1/2"	7 1/4"	22 5/8" x 14 1/4"	563.5	2.7	751	3.15	751	6.25
TW-D-2	2	30 1/2"	12"	22 5/8" x 28 1/4"	1127	5.4	1502	6.3	1502	12.5
TW-D-3	3	44 1/2"	16 3/4"	22 5/8" x 42 1/4"	1690	8.1	2253	9.4	2253	18.8
TW-D-4	4	58 1/2"	21 1/2"	22 5/8" x 56 1/4"	2253	10.8	3004	12.5	3004	25
TW-D-5	5	72 1/2"	26 1/4"	22 5/8" x 70 1/4"	3816	13.5	3755	15.6	3755	31.3
TW-D-6	6	86 1/2"	31"	22 5/8" x 84 1/4"	3380	16.3	4506	18.8	4506	37.6

*model number TW-DW-3 shown below

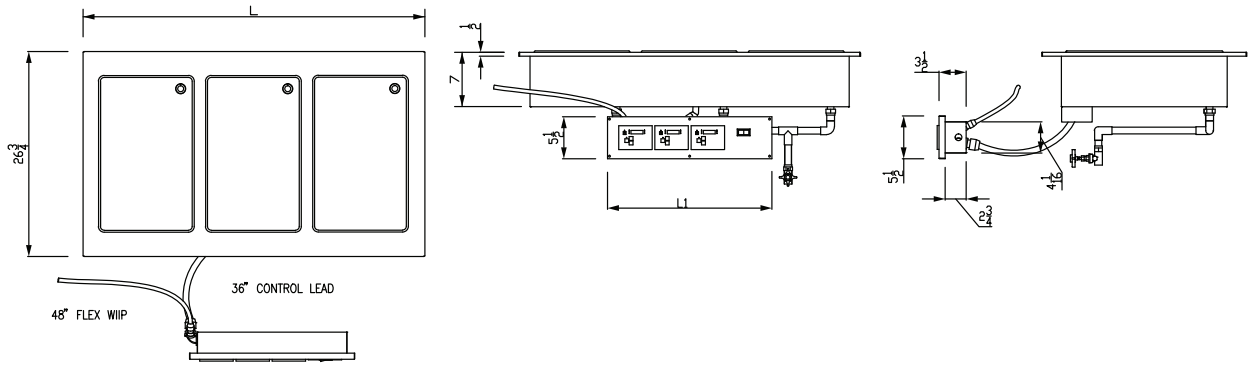

SLIMLINE SIZES

DRY OR WET

Model #	Pans	L	L1	Cut-out size	208V, 1 phase		240V, 1 phase		120V, 1 phase	
					Watts	Amps	Watts	Amps	Watts	Amps
TW-DW-1-SL	1	24 3/4"	7 1/4"	22 5/8" x 28 1/4"	563.5	2.7	751	3.15	751	6.25
TW-DW-2-SL	2	49 1/4"	12"	22 5/8" x 28 1/4"	1127	5.4	1502	6.3	1502	12.5
TW-DW-3-SL	3	71 3/4"	16 3/4"	22 5/8" x 42 1/4"	1690	8.1	2253	9.4	2253	18.8
TW-DW-4-SL	4	94 1/4"	21 1/2"	22 5/8" x 56 1/4"	2253	10.8	3004	12.5	3004	25
TW-DW-5-SL	5	116 3/4"	26 1/4"	22 5/8" x 70 1/4"	3816	13.5	3755	15.6	3755	31.3

NEW!

DRY ONLY

Model #	Pans	L	L1	Cut-out size	208V, 1 phase		240V, 1 phase		120V, 1 phase	
					Watts	Amps	Watts	Amps	Watts	Amps
TW-D-1-SL	1	24 3/4"	7 1/4"	22 5/8" x 28 1/4"	563.5	2.7	751	3.15	751	6.25
TW-D-2-SL	2	49 1/4"	12"	22 5/8" x 28 1/4"	1127	5.4	1502	6.3	1502	12.5
TW-D-3-SL	3	71 3/4"	16 3/4"	22 5/8" x 42 1/4"	1690	8.1	2253	9.4	2253	18.8
TW-D-4-SL	4	94 1/4"	21 1/2"	22 5/8" x 56 1/4"	2253	10.8	3004	12.5	3004	25
TW-D-5-SL	5	116 3/4"	26 1/4"	22 5/8" x 70 1/4"	3816	13.5	3755	15.6	3755	31.3

*model number TW-DW-3-SL shown below

