



Project: _____

Item: _____

Quantity: _____

Date: _____

Models	Length	Wells
<input type="checkbox"/> SPC-TW-D/DW-LP/SS-20-02-36	36 3/8"	2
<input type="checkbox"/> SPC-TW-D/DW-LP/SS-20-03-50	50 3/8"	3
<input type="checkbox"/> SPC-TW-D/DW-LP/SS-20-04-60	60 3/8"	4
<input type="checkbox"/> SPC-TW-D/DW-LP/SS-20-04-66	66 3/8"	4
<input type="checkbox"/> SPC-TW-D/DW-LP/SS-20-05-74	74 3/8"	5
<input type="checkbox"/> SPC-TW-D/DW-LP/SS-20-05-84	84 3/8"	5
<input type="checkbox"/> SPC-TW-D/DW-LP/SS-20-06-96	96 3/8"	6

Standard Features

- ✓ 32" wide 14 gauge stainless steel top
- ✓ 563 watt energy efficient hot food wells at 208V
- ✓ Open storage base
- ✓ 5" Locking swivel casters
- ✓ Cam operated line up lock

SPC-TW-DW-LP-20-03-50



U.L. Sanitation Classified to NSF Standards

- 563 watt heat source outperforms standard 1000 watt elements
- UL-approved to be used wet or dry
- Hot food wells can be used with 208V, 120V, or 240V power

Specifications

Top - 14 gauge stainless steel with square turndown on all sides with corners welded and polished to a #4 satin finish.

Hot Food Units - Provide with dry/moist electric hot food wells to be bottom mounted and have a 12" x 20" die stamped opening with 1/4 raised beaded edge. Interior pan to be 304 stainless steel, deep drawn with coved corners and fully insulated with fiberglass insulation. Each hot food well to use a 563 watt at

208V heat source, or 751 watt at 120-240V heat source, with solid state digital controls for maximum energy efficiency. All switches and controls to be fully accessible. All wells are wired to a master switch.

Body (SS) - Uni-body structure, fabricated from 18 gauge stainless steel, welded ground and polished. Interior reinforced with 12 gauge galvanized uprights to support shelving and a 11 gauge steel bottom.

Body (LP) - Standard grade laminate to cover all sides of an 18 gauge steel uni-body structure. Interior reinforced with 12 gauge galvanized uprights to support shelving and a 11 gauge steel bottom. Corners provided with 3/4" stainless steel trim strips, and bottom edge provided with 1/2" aluminum mop guard.

Options

Top Options

- Height Other Than Standard 36" (Specify_____)
- (RE) Recess For 18" X 26" Pans
- (MR) #7 Hi-Lite Edge
- (TWE) Top Width Extension (Specify _____)

Above the Top

- (CCCP) CrystalClear Counter Protector
- (CCSB) CrystalClear Self Service Single Buffet Shield
- (CCDB) CrystalClear Self Service Double Buffet Shield
- (CCCPADJ) CrystalClear Counter Protector Adjustable for Self-Service to Full Service
- (CCSMT) Crystal Clear Multi-Tier Single Service
- (CCDMT) Crystal Clear Multi-Tier Double Service
- (GA) Sloped Front Protector, Stainless Steel Top, Adjustable
- (GAG) Sloped Front Protector, Glass Top Shelf, Adjustable

- (GC) Sloped Front Protector, Stainless Steel Top, Fixed Glass
- (GCG) Sloped Front Protector, Glass Top Shelf, Fixed Glass
- (M) Buffet Shield Single Service Hinged
- (N) Buffet Shield Double Service Hinged
- (I) 2 Tier Display Shelf, Single Service
- (I2) 2 Tier Display Shelf, Double Service
- (RR) LED Lights
- (S) Heat Lamp
- (U) Heat Lamp with Lights

Tray Slide/Cutting Boards

- (A) 10" Beaded, Stainless Steel Tray Slide
- (B) 10" Flat Surface, Stainless Steel Tray Slide
- (C) 10" Tubular Tray Slide
- (CTS) 10" Corian Tray Slide Solid
- (CTR) 10" Corian Tray Slide Routed Runners
- (D) 6" Wide Stainless Steel Cutting Board

- (E) 6" Wide Richlite® Composite Cutting Board
- (E1) 6" Sanalite® cutting board
- (FF) End Drop Shelf 12" x 30"
- (FTS) Fixed Tray Slide

Base Options

- (EB) Enclosed Base - No Under Storage
- (Y) Hinged Doors
- (BB) Heated Storage Base
- (SS) Stainless Steel Legs
- (TK) S/S Toe Kick
- (MM) Vertical Trim Strips
- (CL) Cylinder Locks

Electrical Options



- (DD) Convenience Outlet, Flush
- (DC) Daisy Chain

Hot Food Serving Counter Powered by Thermalwell™


Laminate Panel (LP) or Stainless Steel (SS)



Hot Food Serving Counter Powered by Thermalwell™
Laminate Panel (LP) or Stainless Steel (SS)

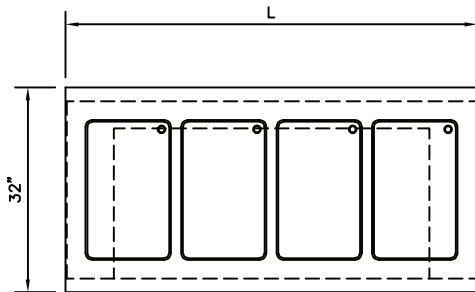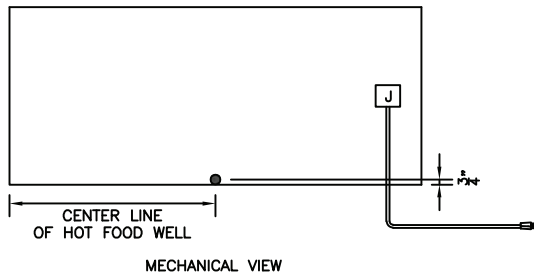

PLAN VIEW

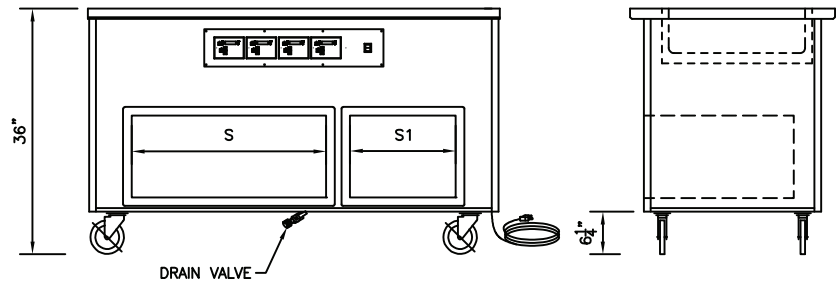

FRONT VIEW

END VIEW

Model	Wells	Length	S	S1	208V, 1 Phase			120V, 1 Phase			240V, 1 Phase			Approx. Ship Weight
					Amps	Watts	Nema	Amps	Watts	Nema	Amps	Watts	Nema	
SPC-TW-D/DW-LP/SS-20-02-36	2	36 3/8"	15"	N/A	5.4	1127	6-15	12.5	1502	5-15	6.3	1502	6-15	400 lbs.
SPC-TW-D/DW-LP/SS-20-03-50	3	50 3/8"	28"	N/A	8.1	1690	6-15	18.8	2253	5-30	9.4	2253	6-15	450 lbs.
SPC-TW-D/DW-LP/SS-20-04-60	4	60 3/8"	28"	15"	10.8	2253	6-15	25	3004	5-50	12.5	3004	6-15	580 lbs.
SPC-TW-D/DW-LP/SS-20-04-66	4	66 3/8"	28"	15"	10.8	2253	6-15	25	3004	5-50	12.5	3004	6-15	600 lbs.
SPC-TW-D/DW-LP/SS-20-05-74	5	74 3/8"	28"	28"	13.5	3816	6-20	31.3	3755	5-50	15.6	3755	6-20	676 lbs.
SPC-TW-D/DW-LP/SS-20-05-84	5	84 3/8"	28"	28"	13.5	3816	6-20	31.3	3755	5-50	15.6	3755	6-20	700 lbs.
SPC-TW-D/DW-LP/SS-20-06-96	6	96 3/8"	28"	28"	16.3	3380	6-20	37.6	4506	5-50	18.8	4506	6-30	750 lbs.

Adding additional electrical components will change the total electric load.

Options (Continued)

Plumbing Options

- (ND) With out Drains
- (DW-P) CPVC Drains to 1/4 turn hose bib valve
- (DW-C) Copper Drains to 1/4 turn hose bib valve
- 1/4 Turn Threaded Ball Valve
- Alternate Drain Location (Consult Factory)
- Water Fill Faucet
- Auto Water Fill

We reserve the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacement for previously purchased equipment.

All equipment to be built in accordance with the Underwriters Laboratories, Inc. and the National Sanitation Foundation, Inc. standards and shall bear the Underwriters Laboratories, Inc. listing label for safety and the Underwriters Laboratories classification label for sanitation.

Décor Options (Contact Factory)

- Vinyl Graphic
- Over-Structure With Signage & Lights
(Specify _____)
- Stand Off Panel
(Specify Materials _____)

REV 9/4/24

A.I.A. File No. 00-0-00

SIS No. 00-0-00

LTI, Inc.
1947 Bill Casey Parkway
Jonesboro, GA 30236

(888) 584-2722
lowtempind.com



Changing
how food is served.™