SpecLine™ by LTI

Ceramic Glass Shelf Hot Top Serving Counter
Molded Fiberglass (MF)

SPC-MTG-MF-42-50

Project: _____

Item: _____

Quantity: _____

Date: _____

Models	Length
☐ **SPC-HTG-MF-28-36**	36 3/8"
☐ **SPC-HTG-MF-42-50**	50 3/8"

Standard Features
- ✓ 30" wide 14 gauge stainless steel top
- ✓ Molded fiberglass body
- ✓ Open Storage Base
- ✓ 5" Locking Swivel Casters

U.L. Sanitation Classified to NSF Standards
ANSI / NSF2

- ■ **First of its kind speckled glass masks scratches**
- ■ **Durable, colorful, molded fiberglass**
- ■ **Sanitary and easy to clean glass maximizes product merchandising**
- ■ **New heat blanket technology ensures even hear across entire surface**
- ■ **Low profile 1¾" stainless flange sits flush with the counter**

Specifications

Top - Top to be 30" wide and fabricated from a minimum of 14 gauge stainless steel with square turndown on all sides and corners fully welded, ground and polished. Top to have #4 satin finish.

Body (MF) - Body to be seamless molded fiberglass (F.R.P.) with smooth exterior surfaces and rounded corners. To be constructed by a hand lay-up process with four layers of 1.5 oz continuous strand fiberglass mat, plus a 24 oz layer of woven roving on the bottom for added strength. Fiberglass to be flame retardant per specification ASTM E-162 having a flame spread of 25% or less. Body interior to be reinforced at each end with 4" wide, 12 gauge galvanized channels welded to form integral U frame for maximum stress relief.

Heated Shelf - Unit to have food safe ceramic glass surface. Glass to be 1/4" thick with UL recognised silicone heat blanket attached to the underside of the glass with high temperature adhesive. To incude solid state digital control. Control to be mounted opn operators side on the counter apron.

Options

Top Options
☐ Height Other Than Standard 36" (Specify ____)
 ☐ (MR)#7 Hi-Lite Edge
☐ (TWE) Top Width Extension (Specify _____)
☐ (AA) Cam Operated Line-up Locks

Above the Top
☐ (CCCP) CrystalClear Counter Protector
☐ (CCSB) CrystalClear Self-Service Single Buffet Shield
☐ (CCDB) CrystalClear Self-Service Double Buffet Shield
☐ (CCPADJ) CrystalClear Counter Protector Adjustable from Self-Service to Full-Service
☐ (CCSMT) Crystal Clear Multi-Tier Single Service
☐ (CCDMT) Crystal Clear Multi-Tier Double Service
☐ (F) Overshelf
☐ (GA) Sloped Front Protector, Adjustable
☐ (GAG) Sloped Front Protector – Adjustable – Glass Top Shelf

☐ (GC) Sloped Front Protector, Glass Clips
☐ (GCG) Sloped Front Protector – Glass Clips – Glass Top Shelf
☐ (M) Buffet Shield Single Service Hinged
☐ (N) Buffet Shield Double Service Hinged
☐ (GTS) Glass Top Shelf for Protector or Buffet Shield
☐ (I) 2 Tier Display Shelf, Single Service
☐ (I2) 2 Tier Display Shelf, Double Service
☐ (RR) LED Lights

Tray Slide/Cutting Boards
☐ (A) 10" Beaded, Stainless Steel Tray Slide
☐ (B) 10" Flat Surface, Stainless Steel
☐ (C) 10" Tubular Tray Slide
☐ (CTS) 10" Corian Tray Slide Solid
☐ (CTR) 10" Corian Tray Slide Routed Runners
☐ (D) 6" Wide Stainless Steel Cutting Board

☐ (E) 6" Wide Richlite® Composite Cutting Board
☐ (E1) 6" Santalite cutting board
☐ (FF) End Drop Shelf 12" x 30"

Base Options
☐ (EB) Enclosed Base – No Under Storage
☐ (Y) Hinged Doors
☐ (BB) Heated Storage Base
☐ (MM) Vertical Trim Strips
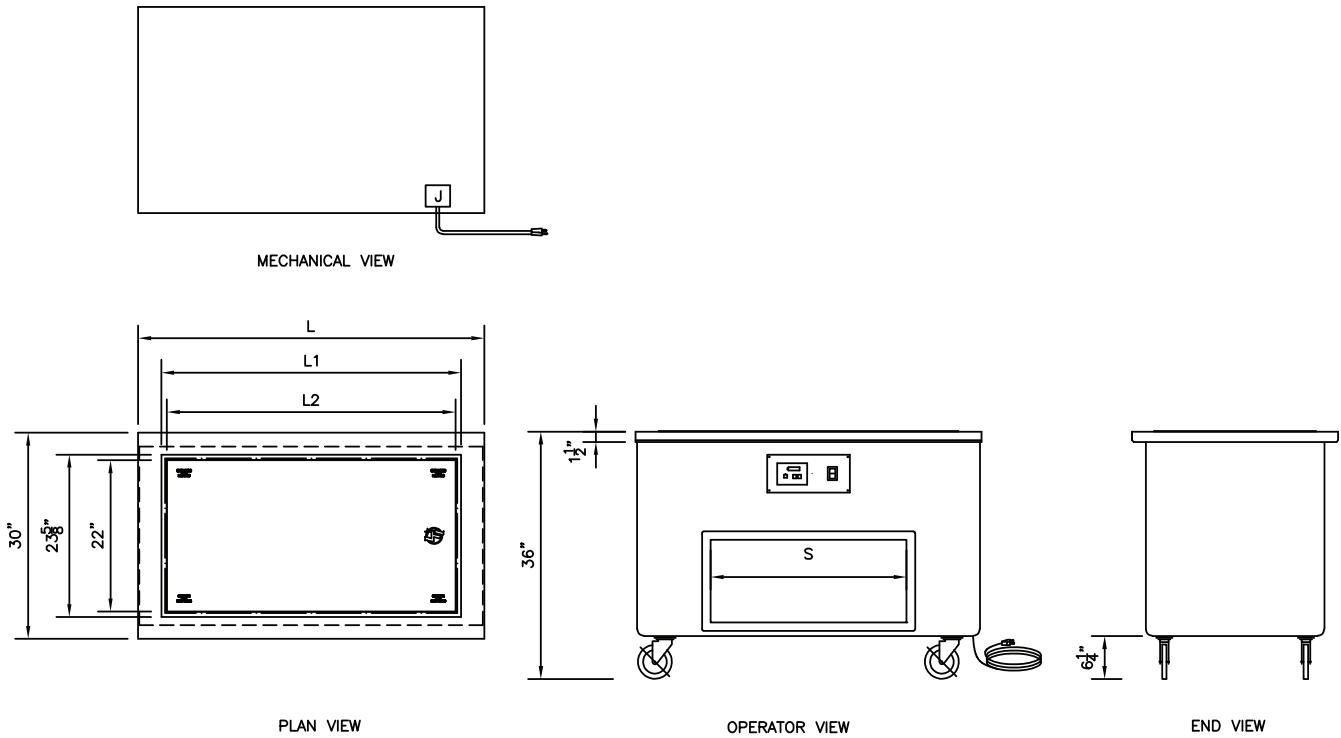☐ (SS) Stainless Steel Legs
☐ S/S Toe Kick

Plumbing & Electrical Options
☐ (DD) Convenience Outlet, Flush
☐ (DC) Daisy Chain Outlet

REV 4/10/24

LTI, Inc.
1947 Bill Casey Parkway
Jonesboro, GA 30236
(888) 584-2722
lowtempind.com

Changing how food is served.™

Approvals:

Ceramic Glass Shelf Hot Top Serving Counter

Molded Fiberglass (MF)

SpecLine *by LTI*

MECHANICAL VIEW

PLAN VIEW

OPERATOR VIEW

END VIEW

Model	L	S	Approx. Ship Weight
SPC-HTG-MF-28-36	36 3/8"	15"	220 lbs.
SPC-HTG-MF-42-50	50 3/8"	28"	260 lbs.

Décor Options (Contact Factory)

❑ Vinyl Graphic Wrap
❑ Body Decal
❑ Over-Structure With Signage & Lights
   (Specify_____)
❑ Stand Off Panel
   (Specify Materials_____)

We reserve the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacement for previously purchased equipment.

All equipment to be built in accordance with the Underwriters Laboratories. Inc. and the National Sanitation Foundation, Inc. standards and shall bear the Underwriters Laboratories, Inc. listing label for safety and the Underwriters Laboratories classification label for sanitation.

REV 4/10/24

LTI, Inc.
1947 Bill Casey Parkway
Jonesboro, GA 30236

(888) 584-2722
lowtempind.com

Changing *how food is served.*™