



Project: \_\_\_\_\_

Item: \_\_\_\_\_

Quantity: \_\_\_\_\_

Date: \_\_\_\_\_

Models	Length
<input type="checkbox"/> CP-HTS-MF-22-28	28 <sup>3/8"</sup>
<input type="checkbox"/> CP-HTS-MF-30-36	36 <sup>3/8"</sup>
<input type="checkbox"/> CP-HTS-MF-44-50	50 <sup>3/8"</sup>
<input type="checkbox"/> CP-HTS-MF-54-60	60 <sup>3/8"</sup>
<input type="checkbox"/> CP-HTS-MF-54-66	66 <sup>3/8"</sup>
<input type="checkbox"/> CP-HTS-MF-68-74	74 <sup>3/8"</sup>
<input type="checkbox"/> CP-HTS-MF-68-84	84 <sup>3/8"</sup>
<input type="checkbox"/> CP-HTS-MF-90-96	96 <sup>3/8"</sup>

### Standard Features

- ✓ 30" wide 14 gauge stainless steel top
- ✓ Molded fiberglass body
- ✓ Open Storage Base
- ✓ 5" Locking Swivel Casters
- ✓ Cam Operated Line-up Locks

CP-HTS-MF-54-60



- With optional heat lamps and pan recess, this is ideal for serving piping hot pizza slices!
- Durable, colorful molded fiberglass mobile units
- Easy to clean, low maintenance

## Specifications

**Top** - Top to be 30" wide and fabricated from a minimum of 14 gauge stainless steel with square turndown on all sides and corners fully welded, ground and polished. Top to have #4 satin finish.

**Body (MF)** - Body to be seamless molded fiberglass (F.R.P.) with smooth exterior surfaces and rounded corners. To be constructed by a hand lay-up process

with four layers of 1.5 oz continuous strand fiberglass mat, plus a 24 oz layer of woven roving on the bottom for added strength. Fiberglass to be flame retardant per specification ASTM E-162 having a flame spread of 25% or less. Body interior to be reinforced at each end with 4 wide, 12 gauge galvanized uprights welded to support shelving to form integral U frame for maximum stress relief

**Heated Top** - Heated top surface to be maintained at 120 deg. F by an insulated heat blanket attached securely to the underside of the 14 gauge stainless steel top. Surface temperature to be controlled by an infinite control mounted into the fiberglass body below the top on the operator's side.

## Options

### Top Options

- Height Other Than Standard 36" (Specify\_\_\_\_\_)
- (RE) Recess For 18" X 26" Pans
- (MR) #7 Hi-Lite Edge
- (TWE) Top Width Extension (Specify \_\_\_\_\_)

### Above the Top

- (CCCP) CrystalClear Counter Protector
- (CCSB) CrystalClear Self Service Single Buffet Shield
- (CCDB) CrystalClear Self Service Double Buffet Shield
- (CCCPADJ) CrystalClear Counter Protector Adjustable for Self-Service to Full Service
- (CCSMT) Crystal Clear Multi-Tier Single Service
- (CCDMT) Crystal Clear Multi-Tier Double Service
- (F) Overshelf 16 Ga. Stainless Steel Top Shelf Mounted On 1-1/4" tubular uprights
- (GA) Sloped Front Protector, Stainless Steel Top, Adjustable
- (GAG) Sloped Front Protector, Glass Top Shelf, Adjustable

- (GC) Sloped Front Protector, Stainless Steel Top, Fixed Glass
- (GCG) Sloped Front Protector, Glass Top Shelf, Fixed Glass
- (M) Buffet Shield Single Service Hinged
- (N) Buffet Shield Double Service Hinged
- (I) 2 Tier Display Shelf, Single Service
- (I2) 2 Tier Display Shelf, Double Service
- (RR) LED Lights
- (S) Heat Lamp
- (U) Heat Lamp with Lights

### Tray Slide/Cutting Board Options

- (A) 10" Beaded, Stainless Steel Tray Slide
- (B) 10" Flat Surface, Stainless Steel Tray Slide
- (C) 10" Tubular Tray Slide
- (CTS) 10" Corian Tray Slide Solid
- (CTR) 10" Corian Tray Slide Routed Runners
- (D) 6" Wide Stainless Steel Cutting Board
- (E) 6" Wide Richlite® Composite Cutting Board

- (E1) 6" Sanalite® Cutting Board
- (FF) End Drop Shelf 12" x 30"

### Base Options

- (EB) Enclosed Base - No Under Storage
- (Y) Hinged Doors
- (BB) Heated Storage Base
- (MM) Vertical Trim Strips
- (SS) Stainless Steel Legs
- (TK) S/S Toe Kick
- (CL) Cylinder Locks

### Electrical Options

- (DD) Convenience Outlet, Flush
- (DC) Daisy Chain

REV 9/4/24

Approvals: \_\_\_\_\_

# Hot Top Serving Counter


Molded Fiberglass (MF)




Hot Top Serving Counter  
Molded Fiberglass (MF)



MECHANICAL VIEW

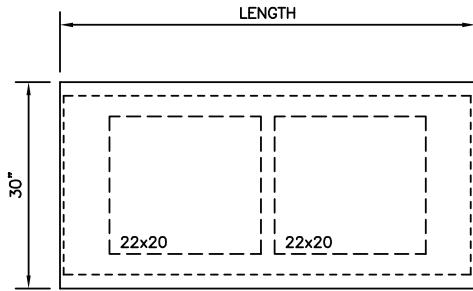

PLAN VIEW

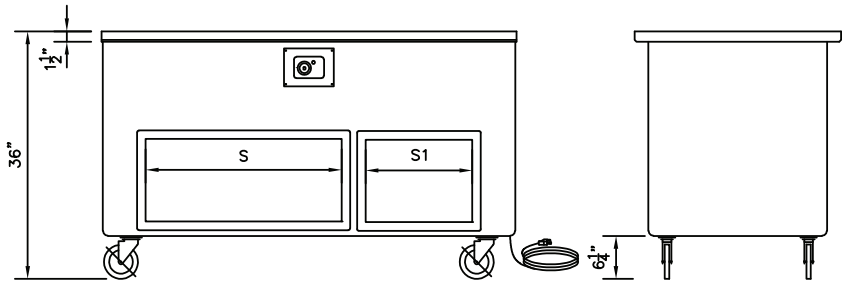

OPERATOR VIEW

END VIEW

Model #	Unit Length (L)	Heated Length (L')	S	S1	120V, 1 Phase		Approximate Ship Weight
					Amps	Nema	
CP-HTS-MF-22-28	28 3/8"	22"	15"	N/A	1	5-15P	150 lbs.
CP-HTS-MF-30-36	36 3/8"	30"	15"	N/A	1.3	5-15P	200 lbs.
CP-HTS-MF-44-50	50 3/8"	44"	28"	N/A	2.4	5-15P	225 lbs.
CP-HTS-MF-54-60	60 3/8"	54"	28"	15"	2.8	5-15P	250 lbs.
CP-HTS-MF-54-66	66 3/8"	54"	28"	15"	2.8	5-15P	275 lbs.
CP-HTS-MF-68-74	74 3/8"	68"	28"	28"	3.7	5-15P	275 lbs.
CP-HTS-MF-68-84	84 3/8"	68"	28"	28"	3.7	5-15P	300 lbs.
CP-HTS-MF-90-96	96 3/8"	90"	28"	28"	4.1	5-15P	325 lbs.

Adding additional electrical components will change the total electric load.

**Décor Options (Contact Factory)**

- Vinyl Graphic
- Over-Structure With Signage & Lights  
(Specify \_\_\_\_\_)
- Stand Off Panel  
(Specify Materials \_\_\_\_\_)

We reserve the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacement for previously purchased equipment.

All equipment to be built in accordance with the Underwriters Laboratories, Inc. and the National Sanitation Foundation, Inc. standards and shall bear the Underwriters Laboratories, Inc. listing label for safety and the Underwriters Laboratories classification label for sanitation.

A.I.A. File No. 00-0-00

SIS No. 00-0-00

REV 9/4/24

