



Project: \_\_\_\_\_

Item: \_\_\_\_\_

Quantity: \_\_\_\_\_

Date: \_\_\_\_\_

Models	Length
<input type="checkbox"/> CP-FT-MF-18-26-36	36 <sup>3/8"</sup>
<input type="checkbox"/> CP-FT-MF-25-36-50	50 <sup>3/8"</sup>
<input type="checkbox"/> CP-FT-MF-25-54-60	60 <sup>3/8"</sup>
<input type="checkbox"/> CP-FT-MF-25-54-66	66 <sup>3/8"</sup>
<input type="checkbox"/> CP-FT-MF-25-54-74	74 <sup>3/8"</sup>
<input type="checkbox"/> CP-FT-MF-25-72-84	84 <sup>3/8"</sup>
<input type="checkbox"/> CP-FT-MF-25-90-96	96 <sup>3/8"</sup>

### Standard Features

- ✓ 30" wide 14 gauge stainless steel top
- ✓ Molded fiberglass body
- ✓ Open Storage Base
- ✓ 5" Locking Swivel Casters
- ✓ Cam Operated Line-up Locks

CP-FT-MF-25-54-60



■ All Frost Top units are sanitation classified under ANSI/NSF-2. For the new NSF-7 requirements, see our CFMA and CFMX series.

■ Removable, washable grate keeps product from freezing to the surface.

## Specifications

**Top** - Top to be 30" wide and fabricated from a minimum of 14 gauge stainless steel with square turnout on all sides and corners fully welded, ground and polished. Top to have #4 satin finish.

**Frost Top** - To be stainless steel watertight pan mounted under a turnout in the 14 gauge stainless steel top providing a 5/8" recess. Recess shall accommodate a removable, washable bar mat to keep a continuous refrigeration coil bonded to the

underside, fully insulated with urethane insulation. To include a full perimeter breaker strip, and a 1" open brass drain extended to a ¼ turn hose bibb shut-off valve below the body. Temperature shall be maintained by a self-contained, fully hermetic type R-449A condensing unit.

**Body (MF)** - Body to be seamless molded fiberglass(F.R.P.) with smooth exterior surfaces and rounded corners. To be constructed by a hand lay-up

process with four layers of 1.5 oz continuous strand fiberglass mat, plus a 24 oz layer of woven roving on the bottom for added strength. Fiberglass to be flame retardant per specification ASTM E-162having a flame spread of 25% or less. Body interior to be reinforced at each end with 4 wide,12 gauge galvanized uprights welded to support shelving to form integral U frame for maximum stress relief.

## Options

### Top Options

- Height Other Than Standard 36" (Specify \_\_\_\_\_)
- (MR)#7 Hi-Lite Edge
- (TWE) Top Width Extension (Specify \_\_\_\_\_)

### Above the Top

- (CCCP) CrystalClear Counter Protector
- (CCSB) CrystalClear Self-Service Single Buffet Shield
- (CCDB) CrystalClear Self-Service Double Buffet Shield
- (CCCPADJ) CrystalClear Counter Protector Adjustable from Self-Service to Full-Service
- (CCSMT) Crystal Clear Multi-Tier Single Service
- (CCDMT) Crystal Clear Multi-Tier Double Service
- (F) Overshelf 16 Ga. Stainless Steel Top Shelf Mounted On 1-1/4" tubular uprights
- (GA) Sloped Front Protector, Stainless Steel Top, Adjustable
- (GAG) Sloped Front Protector, Glass Top Shelf, Adjustable

- (GC) Sloped Front Protector, Stainless Steel Top, Fixed Glass
- (GCG) Sloped Front Protector, Glass Top Shelf, Fixed Glass
- (M) Buffet Shield Single Service Hinged
- (N) Buffet Shield Double Service Hinged
- (I) 2 Tier Display Shelf, Single Service
- (I2) 2 Tier Display Shelf, Double Service
- (FTO) Frost Top Overshelf Display
- (RR) LED Lights

### Tray Slide/Cutting Board Options

- (A) 10" Beaded, Stainless Steel Tray Slide
- (B) 10" Flat Surface, Stainless Steel Tray Slide
- (C) 10" Tubular Tray Slide
- (CTS) 10" Corian Tray Slide Solid
- (CTR) 10" Corian Tray Slide Routed Runners
- (D) 6" Wide Stainless Steel Cutting Board

- (E) 6" Wide Richlite® Composite Cutting Board
- (E1) 6" Sanalite®cutting board
- (FF) End Drop Shelf 12" x 30"

### Base Options

- (EB) Enclosed Base - No Under Storage
- (Y) Hinged Doors
- (MM) Vertical Trim Strips
- (SS) Stainless Steel Legs
- (TK) S/S Toe Kick
- (CL) Cylinder Locks

### Plumbing & Electrical Options

- (DD) Convenience Outlet, Flush
- (DC) Daisy Chain
- ¼ Turn Threaded Ball Valve
- Alternate Drain Location (Consult Factory)

REV 9/4/24



LTI, Inc.  
1947 Bill Casey Parkway (888) 584-2722  
Jonesboro, GA 30236 lowtempind.com


Approvals: \_\_\_\_\_

# Refrigerated Frost Top Serving Counter


Molded Fiberglass (MF)




Refrigerated Frost Top Serving Counter  
Molded Fiberglass (MF)

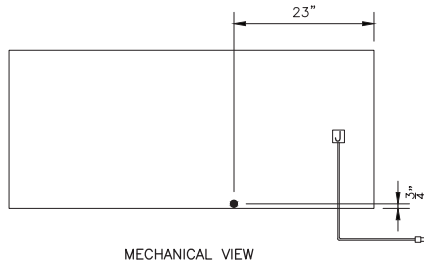


MECHANICAL VIEW

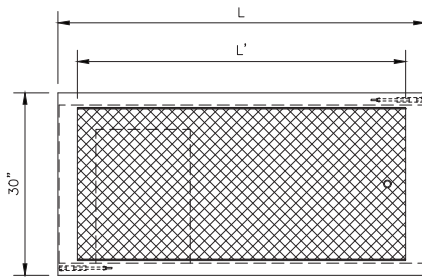

PLAN VIEW



END VIEW

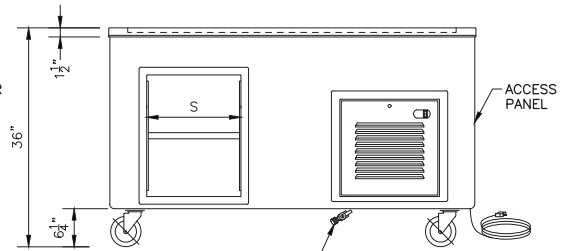

REAR VIEW

Model	Unit Length (L)	(L')	S	S1	Number of 18x26 Sheet Pans	Comp.	120V, 1 Phase		Approximate Ship Weight
							Amps	Nema	
CP-FT-MF-18-26-36	36 3/8"	26"	N/A	N/A	1	1/3	7	5-15P	400 lbs.
CP-FT-MF-25-36-50	50 3/8"	36"	N/A	N/A	2	1/3	7	5-15P	450 lbs.
CP-FT-MF-25-54-60	60 3/8"	54"	15"	N/A	3	1/3	7	5-15P	580 lbs.
CP-FT-MF-25-54-66	66 3/8"	54"	28"	N/A	3	1/3	7	5-15P	600 lbs.
CP-FT-MF-25-54-74	74 3/8"	54"	28"	N/A	3	1/3	7	5-15P	676 lbs.
CP-FT-MF-25-72-84	84 3/8"	72"	28"	15"	4	1/3	7	5-15P	700 lbs.
CP-FT-MF-25-90-96	96 3/8"	90"	28"	15"	5	1/3	7	5-15P	750 lbs.

Adding additional electrical components will change the total electric load.

**Décor Options (Contact Factory)**

- Vinyl Graphic
- Over-Structure With Signage & Lights  
(Specify \_\_\_\_\_)
- Stand Off Panel  
(Specify Materials \_\_\_\_\_)

We reserve the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacement for previously purchased equipment.

All equipment to be built in accordance with the Underwriters Laboratories, Inc. and the National Sanitation Foundation, Inc. standards and shall bear the Underwriters Laboratories, Inc. listing label for safety and the Underwriters Laboratories classification label for sanitation.

A.I.A. File No. 00-0-00

SIS No. 00-0-00

REV 9/4/24

LTI, Inc.  
1947 Bill Casey Parkway  
Jonesboro, GA 30236

(888) 584-2722  
lowtempind.com



**Changing**  
how food is served.™