



Project: _____

Item: _____

Quantity: _____

Date: _____

Models

	Length
<input type="checkbox"/> SPC-FTG454-LP/SS-28-G-36	36 3/8"
<input type="checkbox"/> SPC-FTG454-LP/SS-42-G-50	50 3/8"

Standard Features

- ✓ Solid state digital controls
- ✓ On/off rocker switch
- ✓ 32" wide 14 gauge stainless steel top
- ✓ 5" Locking Swivel Casters
- ✓ Cam Operated Line-up Locks

CP-FTG454-MF-42-G-50



U.L. Sanitation Classified to NSF Standards

- First of its kind speckled glass masks scratches
- Frost top shelf with the flip of a switch
- Sanitary and easy-to-clean glass maximizes product merchandising
- New heat blanket technology ensures even heat across entire surface
- Low profile 1-1/4" stainless flange sits flush with the counter

Specifications

Top - Top to be 32" wide and fabricated from a minimum of 14 gauge stainless steel with square turndown on all sides and corners fully welded, ground and polished. Top to have #4 satin finish.

Body (MF) - Body to be seamless molded fiberglass (F.R.P.) with smooth exterior surfaces and rounded corners. To be constructed by a hand layup process with four layers of 1.5 oz continuous strand fiberglass mat, plus a 24 oz layer of

woven roving on the bottom for added strength. Fiberglass to be flame retardant per specification ASTM E-162 having a flame spread of 25% or less. Body interior to be reinforced at each end with 4" wide, 12 gauge galvanized channels welded to form integral U frame for maximum stress relief.

Equipment - Frost top ceramic glass shelf to have food safe ceramic glass surface. Glass to be 1/4" thick and be UL recognized. 1/2" aluminum plate to have

embedded copper refrigeration lines inside of plate. Refrigeration plate to be encased in a heavy duty stainless steel framework foamed with high density polyurethane foam. Unit to include on off rocker switch for cold operation. Unit to be fully operational and ready to be installed and supplied with 10' long cord and plug. Unit to have a properly sized self-contained refrigeration system complete with controls and operate on R-454C refrigerant. Unit to be UL listed and shall bear the UL classified EPH label.

Options

Top

- Height Other Than Standard 36" (Specify _____)
- (RE) Recess For 18" x 26" Pans
- (MR) #7 Hi-Lite Edge
- (TWE) Top Width Extension (Specify _____)

Above the Top

- (CCCP) CrystalClear Counter Protector
- (CCSB) CrystalClear Self Service Single Buffet Shield
- (CCDB) CrystalClear Self Service Double Buffet Shield
- (CCCPADJ) CrystalClear Counter Protector
Adjustable for Self-Service to Full Service
- (CCSMT) Crystal Clear Multi-Tier Single Service
- (CCDMT) Crystal Clear Multi-Tier Double Service
- (F) Overshelf 16 Ga. Stainless Steel Top Shelf
Mounted On 1-1/4" tubular uprights
- (GA) Sloped Front Protector, Stainless Steel Top, Adj.
- (GAG) Sloped Front Protector, Glass Top Shelf, Adj.

- (GC) Sloped Front Protector, Stainless Steel Top, Fixed Glass

- (GCG) Sloped Front Protector, Glass Top Shelf, Fixed Glass

- (M) Buffet Shield Single Service Hinged

- (N) Buffet Shield Double Service Hinged

- (I) 2 Tier Display Shelf, Single Service

- (I2) 2 Tier Display Shelf, Double Service

- (FTO) Frost Top Overshelf Display

- (RR) LED Lights

Tray Slide / Cutting Board Options

- (A) 10" Beaded, Stainless Steel Tray Slide
- (B) 10" Flat Surface, Stainless Steel Tray Slide
- (C) 10" Tubular Tray Slide
- (CTS) 10" Corian Tray Slide Solid
- (CTR) 10" Corian Tray Slide Routed Runners
- (D) 6" Wide Stainless Steel Cutting Board

- (E) 6" Wide Richlite® Composite Cutting Board

- (E1) 6" Wide Sanalite® Cutting Board

- (FF) End Drop Shelf 12" x 30"

- (FTS) Fixed Tray Slide

Base Options

- (MM) Vertical Trim Strips
- (SS) Stainless Steel Legs
- (TK) S/S Toe Kick

Plumbing & Electrical Options

- (DD) Convenience Outlet, Flush
- (DC) Daisy Chain Outlet



LTI, Inc.

 1947 Bill Casey Parkway
Jonesboro, GA 30236

 (888) 584-2722
lowtempind.com


Approvals:

FTG Frost Top Ceramic Glass Serving Counter

Laminate Panel (LP) or Stainless Steel (SS)

 **SpecLine**TM

by LTI

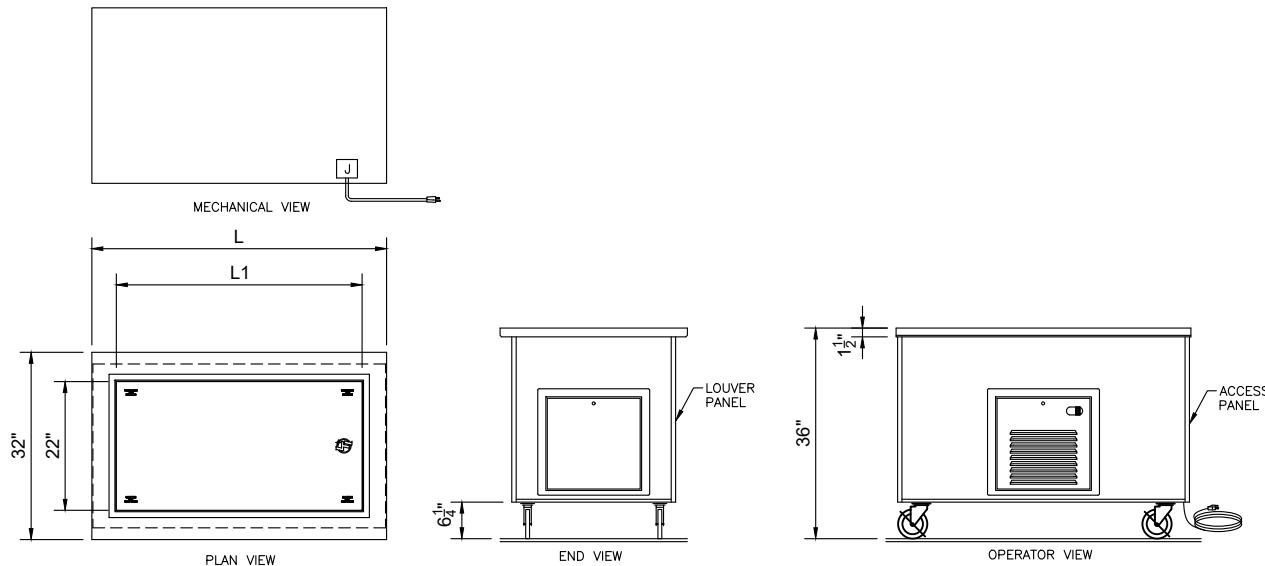

Refrigerated Frost Top Serving Counter

Molded Fiberglass (MF)

Model #	Stainless Steel Top		Frosted Area	120V, 1 Phase		Refrigerant
	L	L1		Amps	Plug	
SPC-FTG454-LP/SS-28-G-36	36 3/8"	28"	616 sq/in	5.2	5-15P	R-454C
SPC-FTG454-LP/SS-42-G-50	50 3/8"	42"	924 sq/in	5.2	5-15P	R-454C

Décor Options (Contact Factory)

- Vinyl Graphic
- Over-Structure With Signage & Lights
(Specify _____)
- Stand Off Panel
(Specify Materials _____)

We reserve the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacement for previously purchased equipment.

All equipment to be built in accordance with the Underwriters Laboratories, Inc. and the National Sanitation Foundation, Inc. standards and shall bear the Underwriters Laboratories, Inc. listing label for safety and the Underwriters Laboratories classification label for sanitation.

REV 12/11/25

LTI, Inc.
1947 Bill Casey Parkway
Jonesboro, GA 30236

(888) 584-2722
lowtempind.com

